







CLOSE COUPLE TOILET


**Cygnets Hygiene Rim Square
CCBTW - Back Inlet with SpaLet E-
Bidet Seat AS01012**

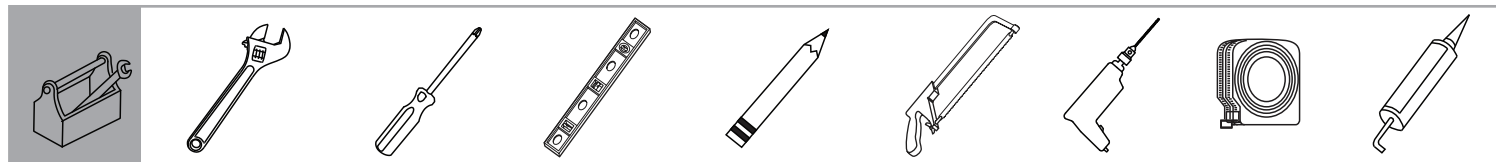


American Standard



x1



x1



x1



x1



x1




x1




x1








x1










x1




x1

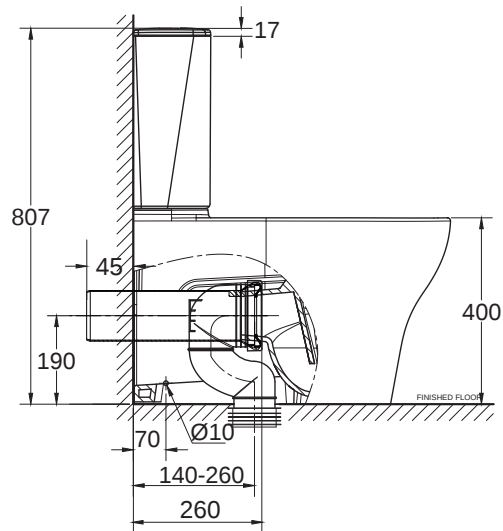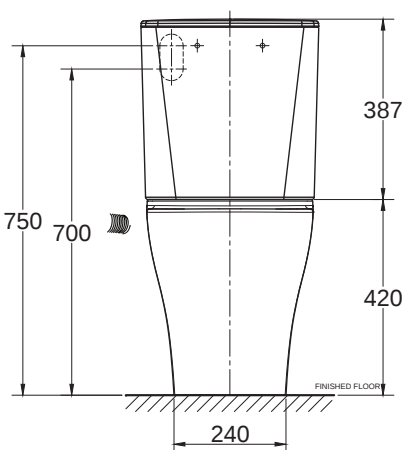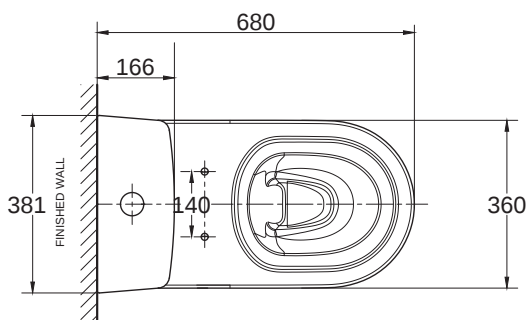

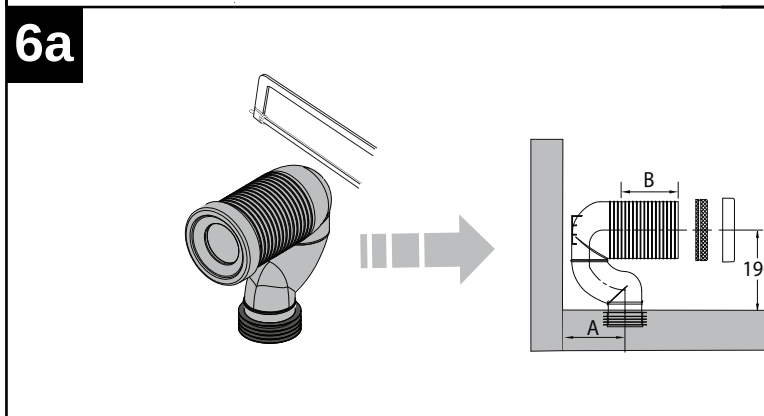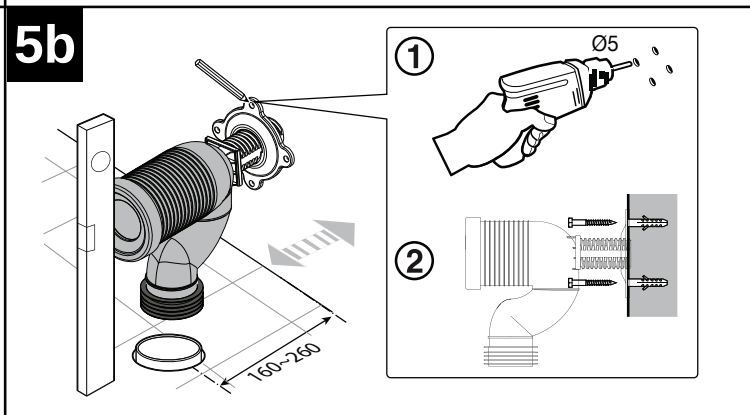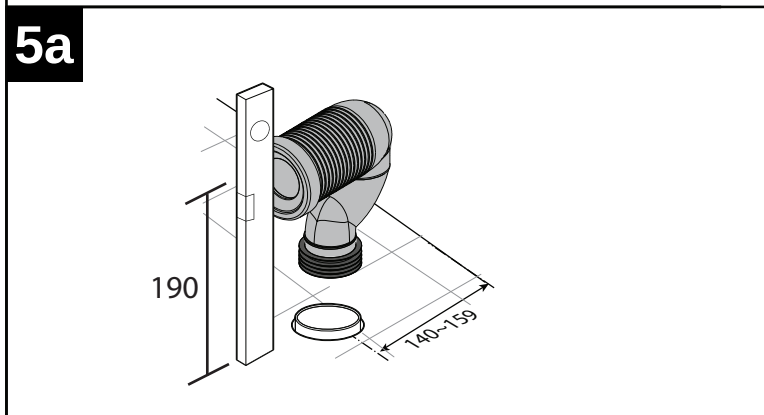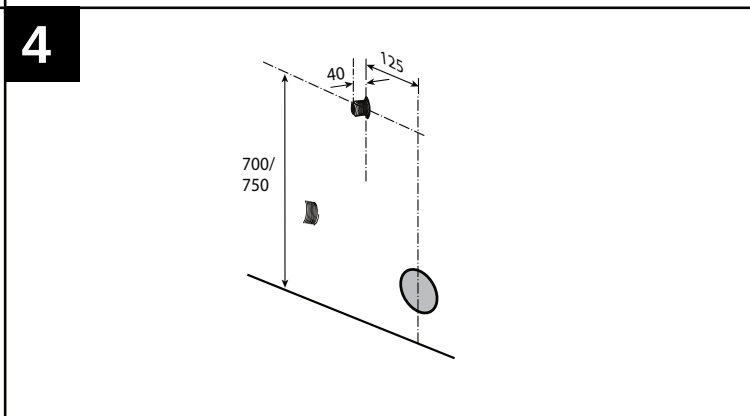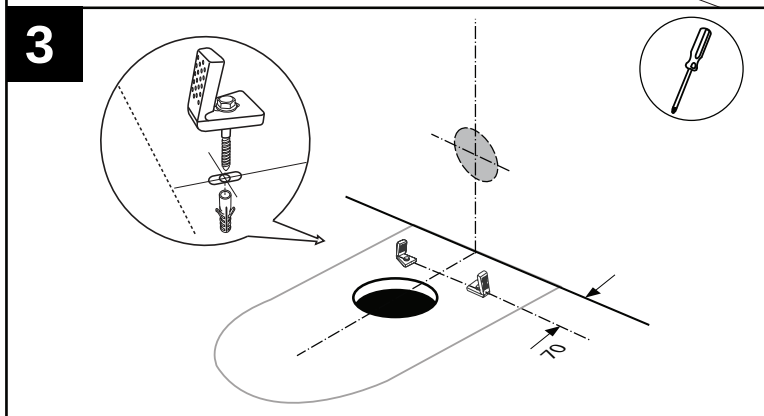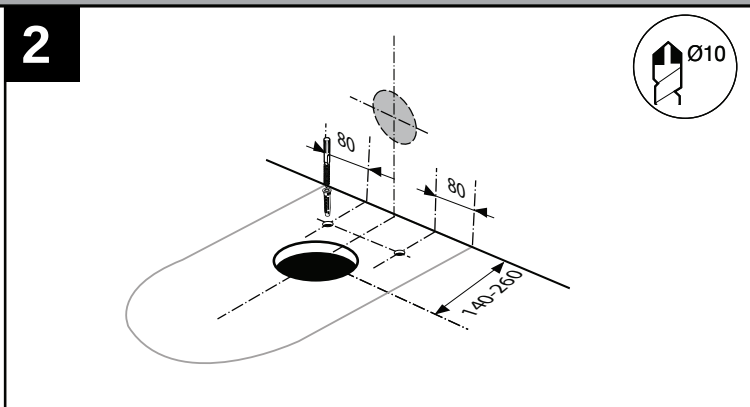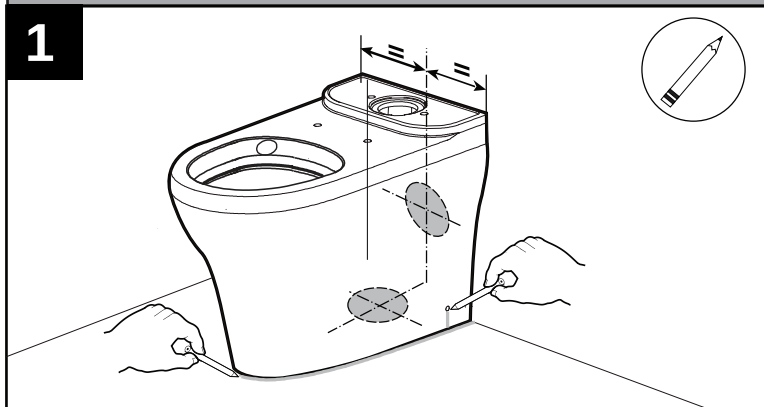

ROUGHING - IN (A)	CONNECTOR CUTOUT (B)
140-150 mm.	10 mm.
151-159 mm.	20 mm.

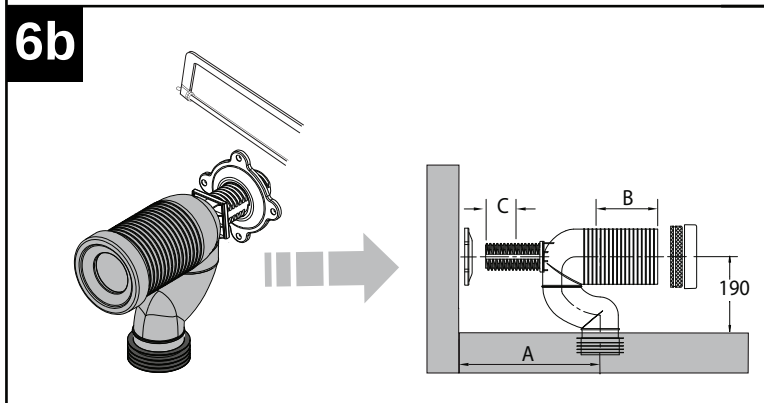

ROUGHING - IN (A)	CONNECTOR CUTOUT (B)	ROUGHING-IN (A)	CONNECTOR CUTOUT (B)
160-170 mm.	30 mm.	211-220 mm.	80 mm.
171-180 mm.	40 mm.	221-230 mm.	90 mm.
181-190 mm.	50 mm.	l	l
191-200 mm.	60 mm.	261-270 mm.	130 mm.
201-210 mm.	70 mm.	C=116 - (A-160)	



March 20
M33159 Rev.01

CLOSE COUPLE TOILET

Installation Manual






Cygnnet Hygiene Rim Over-height Square

Cygnnet Hygiene Rim Square


Back Inlet




American Standard

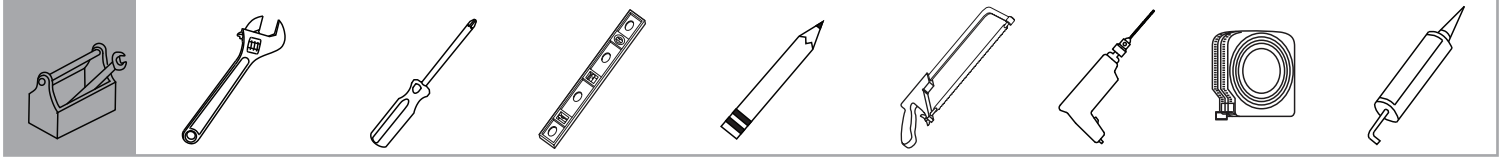


x1




x1



x1



x1




x1



x1




x1




Option 1


x1



x1






Option 2











Cygnet Hygiene Rim Over-height Square

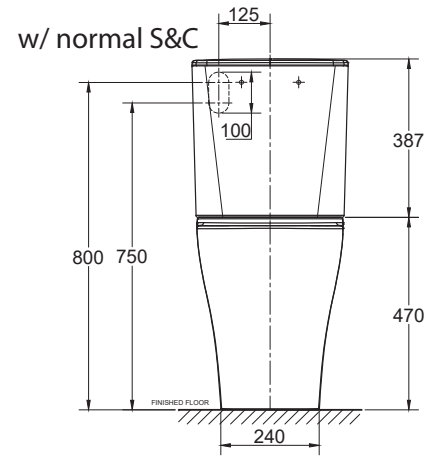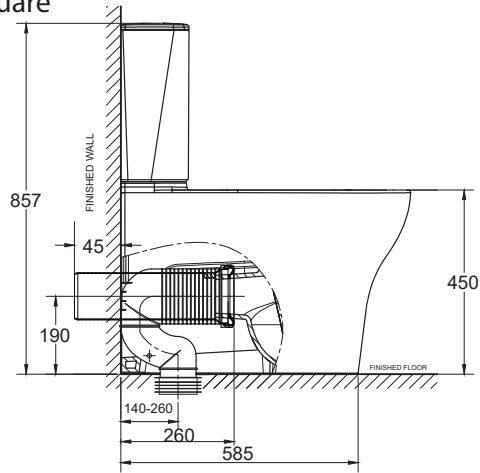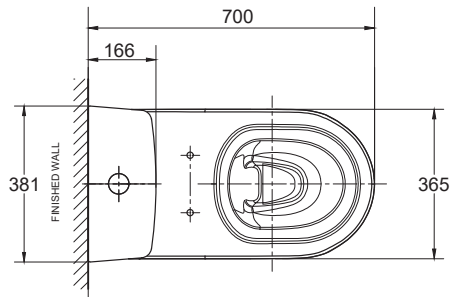




Cygnet Hygiene Rim Square

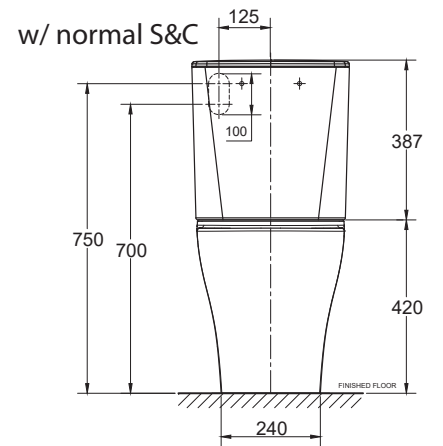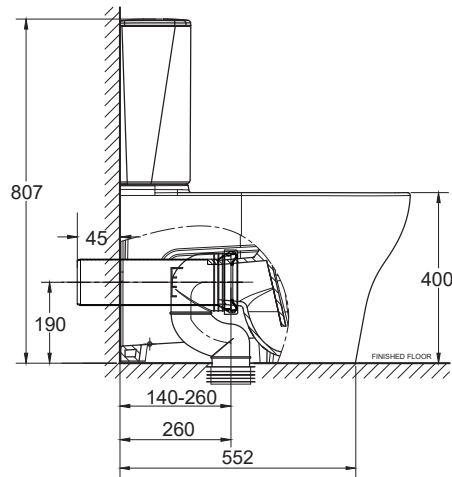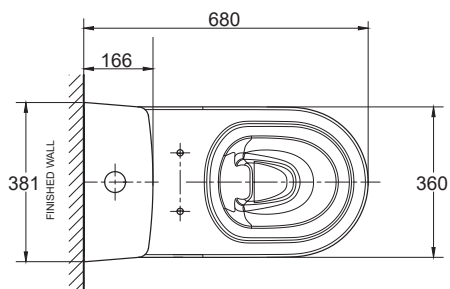

Cygnet Hygiene Rim Over-height Square

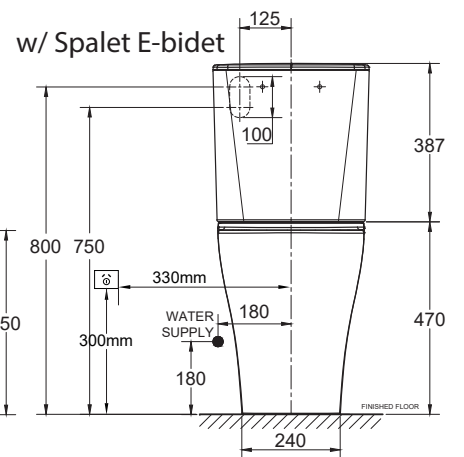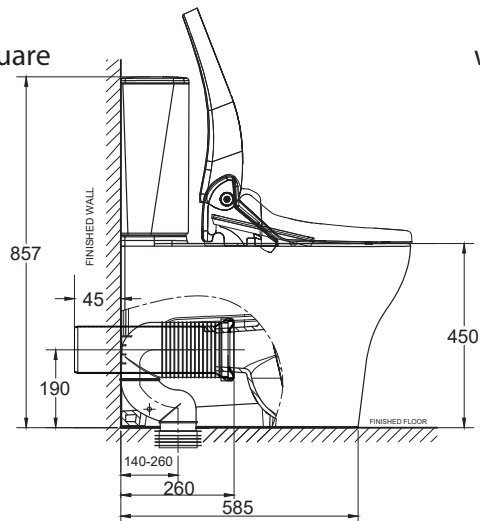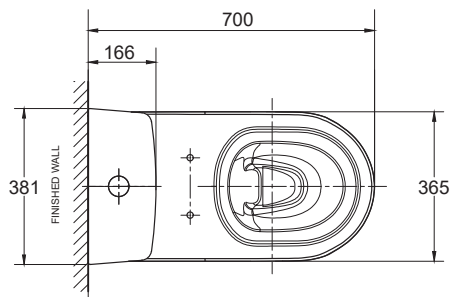


Cygnet Hygiene Rim Square

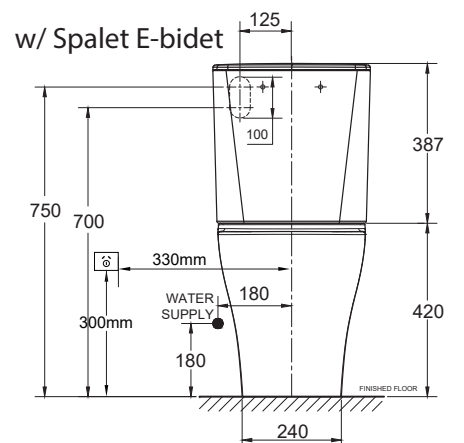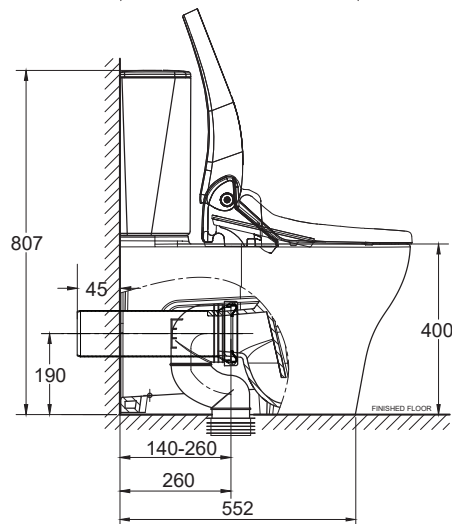
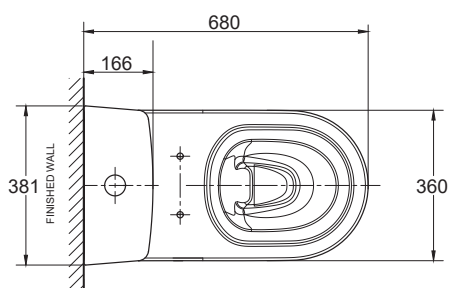




1

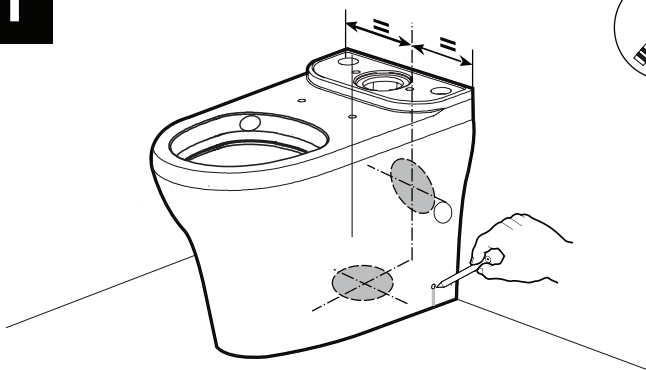


2.1 / 2.2

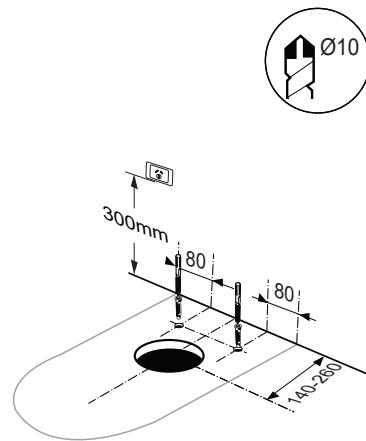


Option 2: Spalet Installation

3

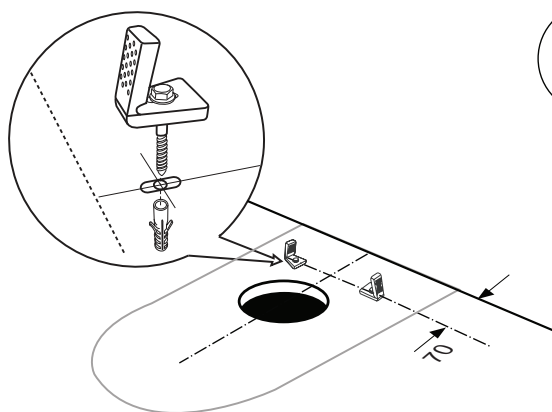


4


Model	Height (A)
Cygnat Hygiene Rim Over-height Square	750/800 mm.
Cygnat Hygiene Rim Square	700/750 mm.

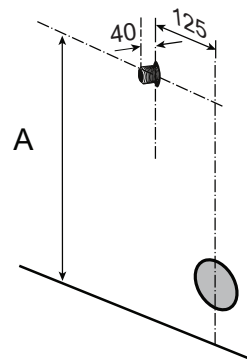


5

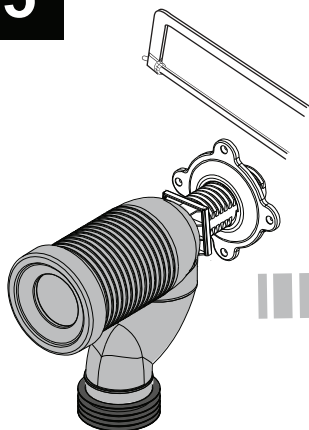



ROUGHING - IN (A)	CONNECTOR CUTOUT (B)	ROUGHING - IN (A)	CONNECTOR CUTOUT (B)	ROUGHING-IN (A)	CONNECTOR CUTOUT (B)
140-149 mm.	10 mm.	160-170 mm.	30 mm.	221-230 mm.	90 mm.
150-159 mm.	20 mm.	171-180 mm.	40 mm.	231-240 mm.	100 mm.
		181-190 mm.	50 mm.	241-250 mm.	110 mm.
		191-200 mm.	60 mm.	251-260 mm.	120 mm.
		201-210 mm.	70 mm.	261-270 mm.	130 mm.
		211-220 mm.	80 mm.	C= 116 - (A-160)	




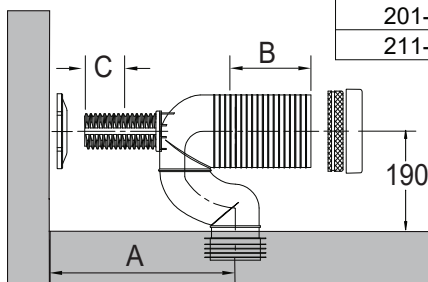


6a





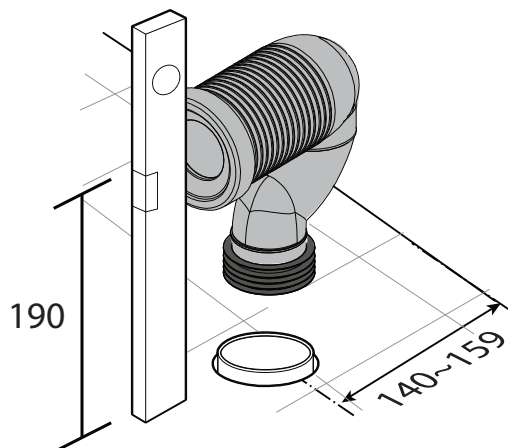


6b

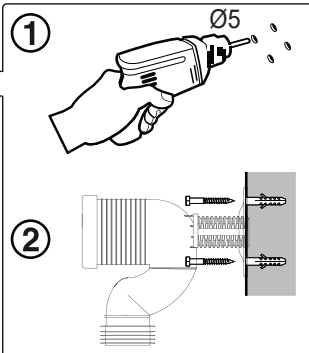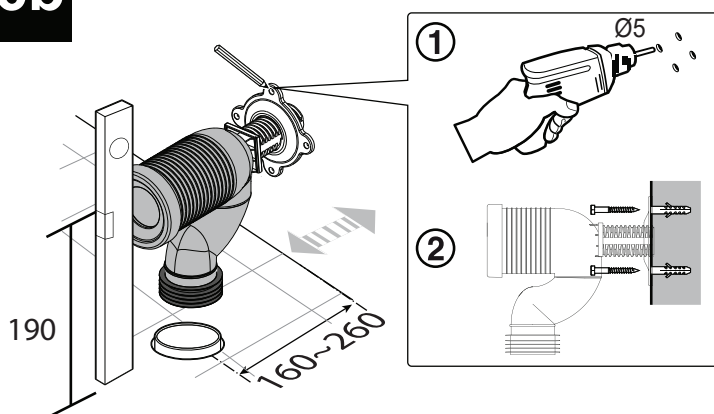

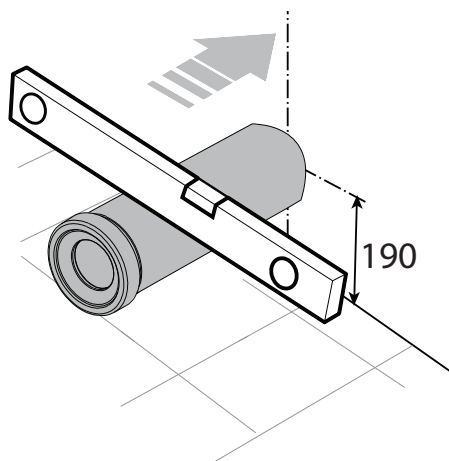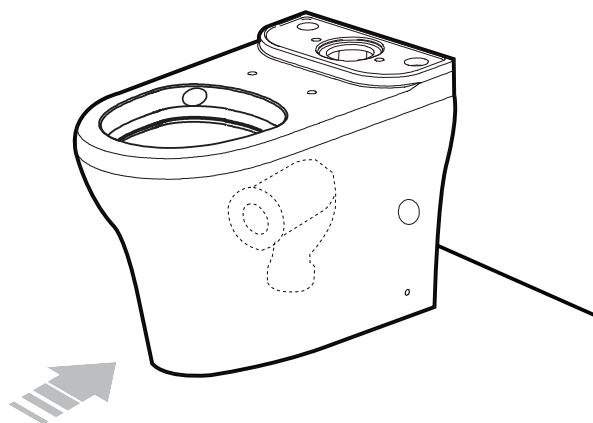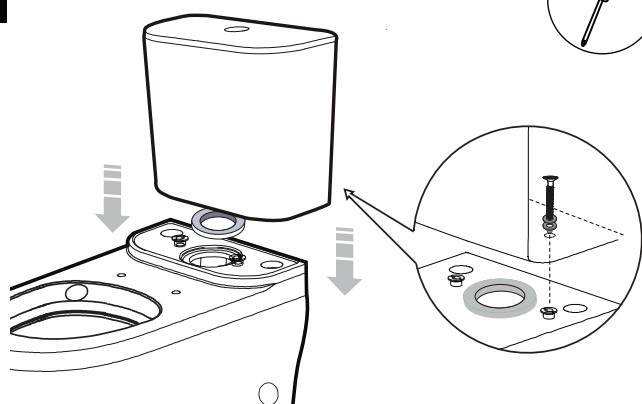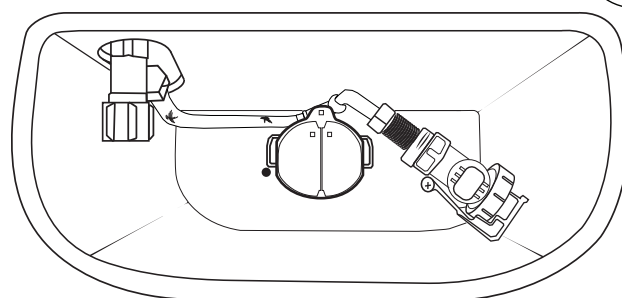**7****8****9****10**

The flexible hose in this cistern must not be submerged in water at any time.

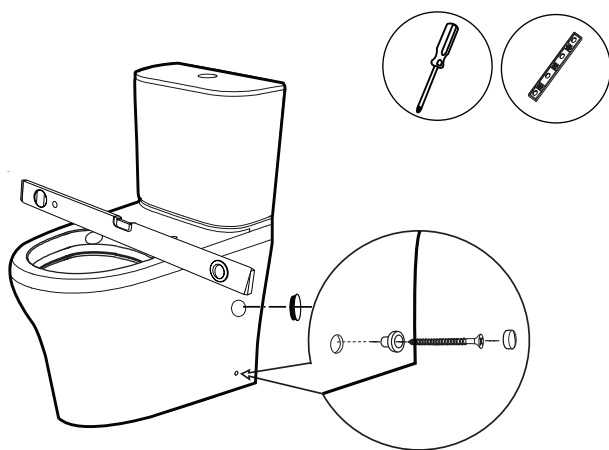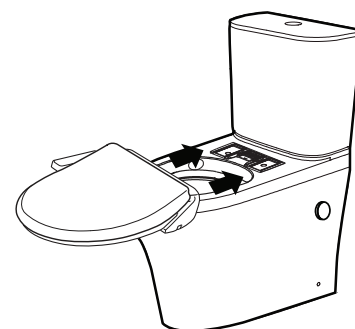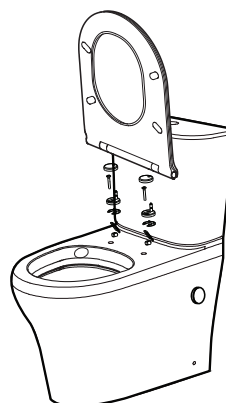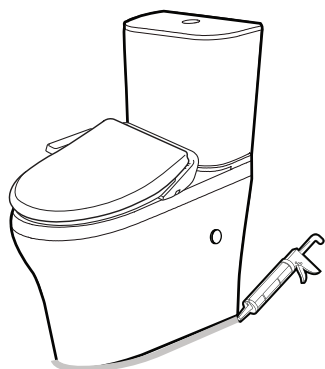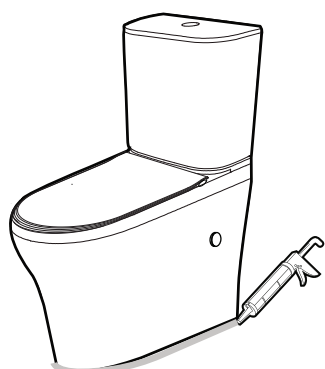11**12.1 / 12.2****13.1 / 13.2****14**

IMPORTANT

Before turning on water supply check:

1. Cistern is installed properly
2. All moving components operate freely
3. All couplings are tightened correctly

Now fill cistern and recheck water level:

4. Check carefully for leaks
5. Test the cistern flushes