


Sugeni Wall-Hung Basin / Pedestal Basin / Semi- Pedestal Basin Installation Manual



American Standard

CCAS1511
CCAS0511
CCAS0512

Thank you for choosing our product. Our products have long represented reliable quality. To ensure a smooth installation, read these instructions carefully before installation, review the recommended tools and materials, and handle the new product with care.

WARNING: Fragile product. Handle gently to avoid product breakage and personal injury.

Note: The illustrations may differ from the actual product. All installation procedures must comply with local plumbing and building codes.

Recommended Tools and Materials

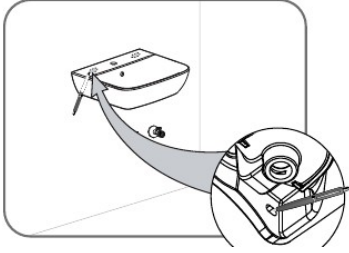
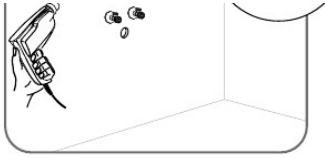
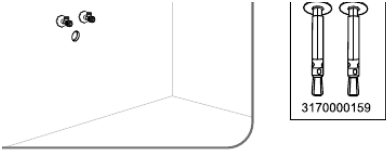
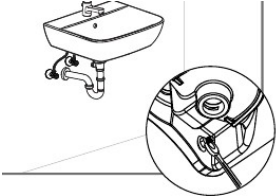
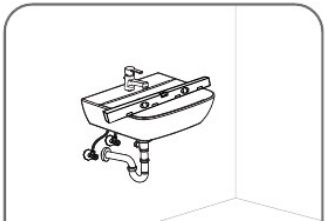
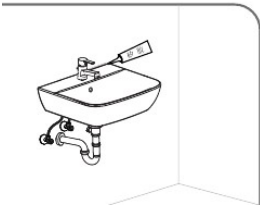
Utility knife	Adjustable wrench	Spanner
Impact drill	Level	Caulking gun
Tape measure	Locking pliers	Phillips screwdriver
Flat-head screwdriver		

Basic Dimensions

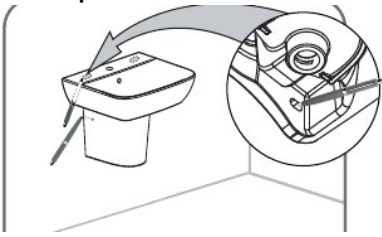
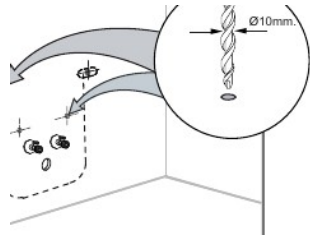
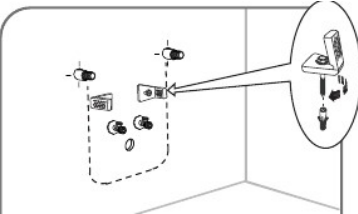
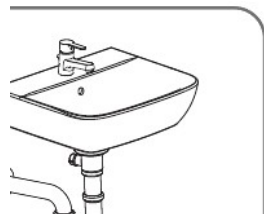
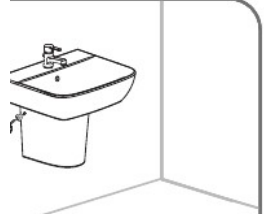
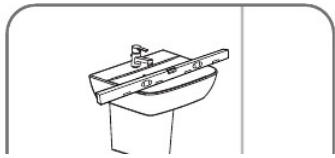
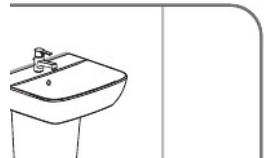
Unit: mm. Each basin is supplied with a dimensional drawing. The drawing is for reference only; actual product dimensions may vary within tolerance. Dimensions marked with an asterisk are recommended installation dimensions.

Item	Dimension / note
Basin width	550 mm
Basin depth	460 mm
Hole center/reference dimension	65 mm / 210 mm as shown in the dimensional drawing
Recommended finished basin height	*850 mm
Recommended rough-in height references	*500 mm / *550 mm
Drain outlet setback	150 mm

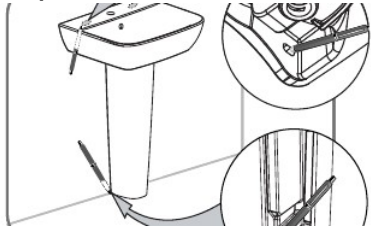
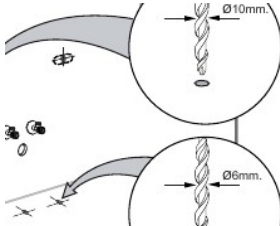
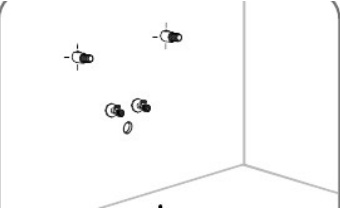

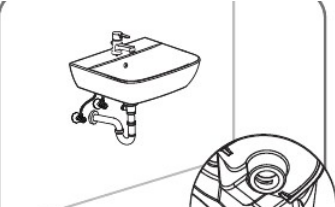
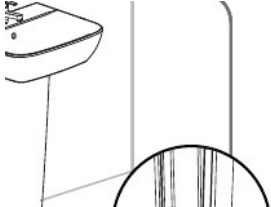
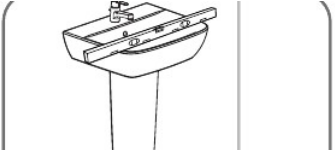

A. Wall-Hung Basin Installation

1. Prepare for wall-hung basin installation  Place the basin in its installation position against the finished wall. Mark the screw fixing positions through the mounting holes.	2. Drill holes  Remove the basin and drill holes at the marked positions. Use a Ø10 mm drill bit where indicated.
3. Install wall fixing hardware  Embed the expansion bolts (3170000159) in the wall.	4. Install faucet and drain pipe  Install the drain assembly. Return the basin to position, connect the trap to the drain assembly, hand-tighten, and check alignment. Some tailpiece or trap trimming may be required.
5. Fix the basin  Secure the basin to the wall. Install washers, nuts, and hooks. Level and align the assembly. Connect hot and cold water supply lines to the basin angle valves and tighten the trap connection.	6. Check level  After installation, check the basin with a spirit level.
7. Complete installation  Open the water supply angle valves and check for leaks. If there are no leaks, apply silicone sealant along the basin edge. Silicone sealant is not supplied.	

B. Semi-Pedestal Basin Installation

1. Prepare for semi-pedestal installation  Mark the drilling positions.	2. Drill holes  Remove the basin and drill holes. Use a Ø10 mm drill bit where indicated.
3. Install expansion bolts  Embed the expansion bolts and the L-shaped bracket.	4. Install basin fittings  Install the faucet and drain pipe.
5. Fix the basin  Position the basin and tighten the screws. Connect the drain pipe to the wall drain outlet, then connect the hot and cold water supply lines.	6. Fix the semi-pedestal  Secure the semi-pedestal in place.
7. Check level  Check the basin with a spirit level.	8. Complete installation  Apply silicone sealant to ensure a watertight seal. Silicone sealant is not supplied.

C. Pedestal Basin Installation

1. Prepare for pedestal installation  Mark the drilling positions for the basin and pedestal.	2. Drill holes  Remove the basin and drill holes. Use Ø10 mm and Ø6 mm drill bits where indicated.
3. Install expansion bolts  Embed the expansion bolts.	4. Install basin fittings  Install the faucet and drain pipe.
5. Fix the basin  Position the basin and tighten the screws. Connect the drain pipe to the wall drain outlet, then connect the hot and cold water supply lines.	6. Fix the full pedestal  Secure the full pedestal in place.
7. Check level  Check the basin with a spirit level.	8. Complete installation  Apply silicone sealant to ensure a watertight seal. Silicone sealant is not supplied.

Maintenance and Care

Do not use abrasive cleaners or corrosive cleaners to clean the surface of the fittings. Use a mild detergent, warm water, and a soft cloth to remove general dirt and soap deposits from fittings and product surfaces. After cleaning, dry the surface with a soft cloth to restore the original gloss.

Warranty Information

(Only for China Market)

To protect your legal rights and interests, contact the seller or distributor to obtain an electronic warranty card, or follow the WeChat official account "American Standard Quality Service". Apply online through: "My American Standard" -> "Warranty Information" -> "Verify Identity".

For any questions, contact the nearest American Standard after-sales service center or call the national toll-free number for assistance.

National toll-free numbers: 400-820-3191 (landline/mobile users); 800-820-3191 (landline users).

Official after-sales WeChat account: American Standard Quality Service.