


Bianca Care Basin Mixer

Nero




Lead Free

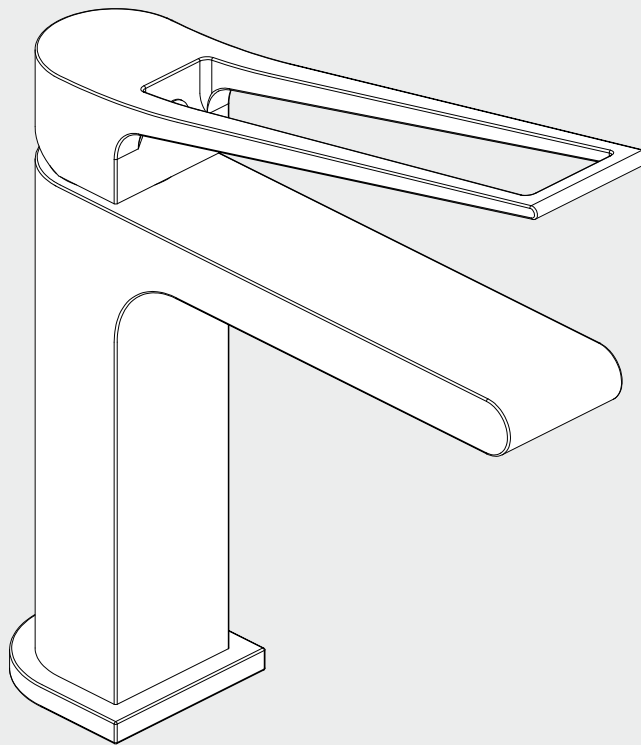

Version:202506



Drawing

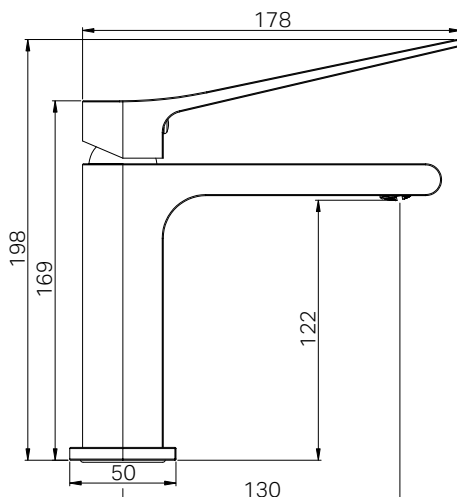

Specifications

Watermark License

WM-060073

Temperature Rating

Min 1°C-Max75°C

Pressure Rating

Min 150kpa - Max 500kpa

Packaging Includes

1x Basin Mixer
1x Installation Kit
1x Aerator Spanner

Finish & SKU



Chrome
NR321502aCH



Gun Metal
NR321502aGM



Brushed Bronze
NR321502aBZ



Matte Black
NR321502aMB




Brushed Gold
NR321502aBG



Brushed Nickel
NR321502aBN

*Dimensions are nominal measurements only.

Installation Instruction

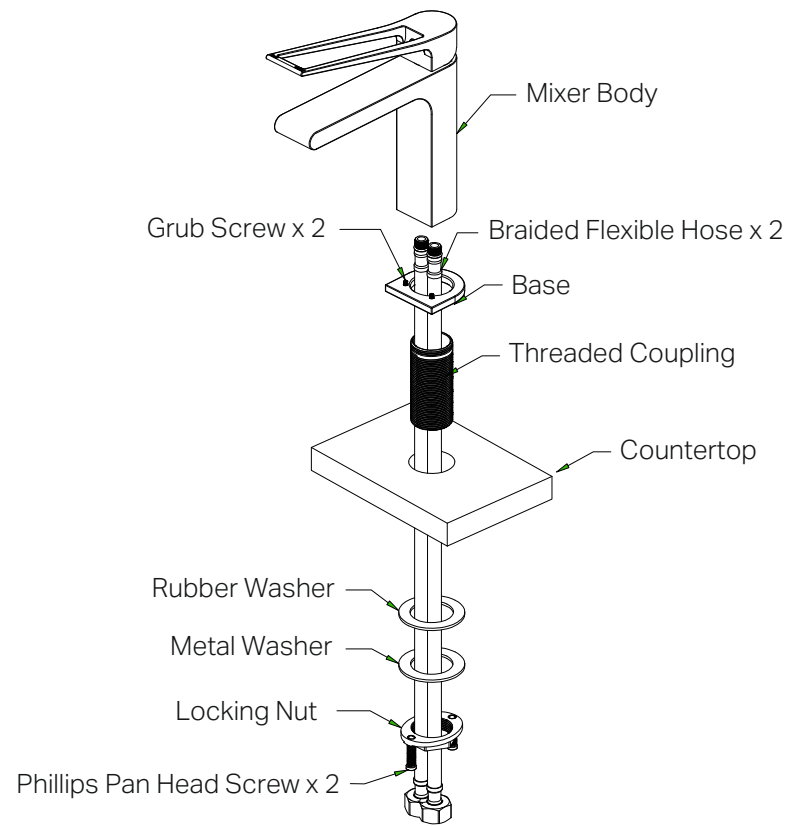

GENERAL INSTRUCTIONS:


- This product must be installed by a licensed plumber. Ensure that your plumbing installation complies with the Australian/New Zealand Standard AS/NZS 3500.
- Extended Lever compliant to AS1428.1 when standard basin is used, design for access and mobility requirements.
- All pipework must be thoroughly flushed prior to the installation of the mixer. In-line filters must be fitted on both hot and cold supplies to prevent foreign particles from damaging the ceramic cartridge.
- All outlets used primarily for personal hygiene must deliver water at a safe temperature in accordance with regional regulations.

NOTE:


- Do not hydrostatic test the installation with this mixer installed. Damage to the ceramic cartridge may occur.
- Do not remove the ceramic cartridge from the mixer when installing.
- After installation, all connections must be checked for leaks.
- This mixer is not recommended for use in uncontrolled heating systems such as wet-backs or solar heating units unless a suitable tempering valve is fitted.
- If limited water flow is experienced, locate aerator and filter washers and clean away foreign material as required.
- It is the responsibility of the plumber to ensure a waterproof seal is achieved between the product and mounting surface. If in doubt about the quality of the seal, remove the product and reinstall.
- The flexible hoses are fixed and cannot be replaced with other hoses.

MAINTENANCE AND CARE:


- Regularly check the mixer and connections for signs of wear or leaks.
- Clean the tap with mild soapy water to maintain its appearance, avoiding harsh chemicals and abrasive materials that may damage the finish.



01. Screw the threaded coupling into the mixer body and insert the base into the threaded coupling, ensuring that the retaining screw on the base aligns with the reserved holes at the bottom of the mixer body.




03. Insert the threaded coupling at the bottom of the mixer into the mounting hole. Ensure that the O-ring is positioned at the bottom of the base to prevent leakage.

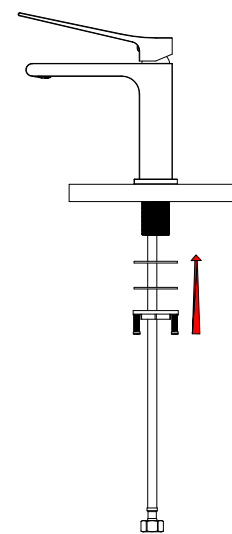


FINAL INSPECTION:

- Ensure the tap operates smoothly and that there are no leaks at the connections.
- Clean the area and the newly installed tap with a soft cloth to remove any installation residues.

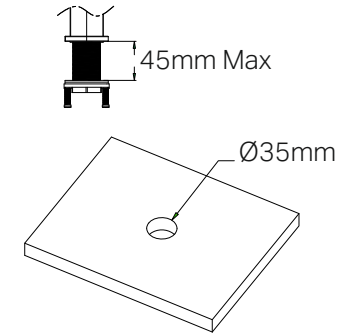

02. Pre-drill or create a hole with a diameter of 35mm at the proper location.
Note: the thickness of the countertop should be between 10mm-45mm.



04. Slide the Locking Nut, Metal Washer, and Rubber Washer onto the braided flexible hoses in sequence.

05. Screw the braided flexible hoses into the mixer body through the threaded coupling and tighten them. Then tighten the locking nut with Philips Screws to secure the mixer to the countertop. The installation is complete.

Nero

