

Bianca


Pull Out Sink Mixer

With Vegie Spray Function

Nero




Lead Free

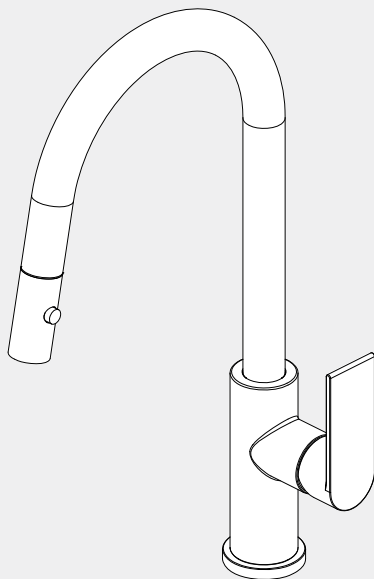

Version : 202506a



Drawing

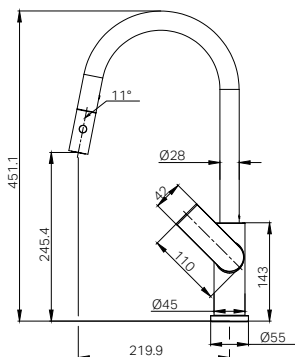

Specifications

Watermark License

WM-060073

Temperature Rating

Min 1 °C - Max 75 °C

Pressure Rating

Min 150kpa - Max 500kpa

Finish & SKU

 **Chrome**
NR321508CH

 **Matte Black**
NR321508MB

 **Gun Metal**
NR321508GM

 **Brushed Gold**
NR321508BG

 **Brushed Nickel**
NR321508BN

 **Brushed Bronze**
NR321508BZ

Packing Includes

1x Pull out sink Mixer
2x Flexible Hose
1x Installation Kits

*Dimensions are nominal measurements only.


INSTALLATION INSTRUCTIONS

GENERAL INSTRUCTIONS:


- This product must be installed by a licensed plumber. Ensure that your plumbing installation complies with the Australian/New Zealand Standard AS/NZS 3500.
- All pipework must be thoroughly flushed prior to the installation of the mixer. In-line filters must be fitted on both hot and cold supplies to prevent foreign particles from damaging the ceramic cartridge.
- All outlets used primarily for personal hygiene must deliver water at a safe temperature in accordance with regional regulations.

NOTE:

- Do not hydrostatic test the installation with this mixer installed. Damage to the ceramic cartridge may occur.
- Do not remove the ceramic cartridge from the mixer when installing.
- After installation, all connections must be checked for leaks.
- This mixer is not recommended for use in uncontrolled heating systems such as wet-backs or solar heating units unless a suitable tempering valve is fitted.
- If limited water flow is experienced, locate aerator and filter washers and clean away foreign material as required.
- It is the responsibility of the plumber to ensure a waterproof seal is achieved between the product and mounting surface. If in doubt about the quality of the seal, remove the product and reinstall.

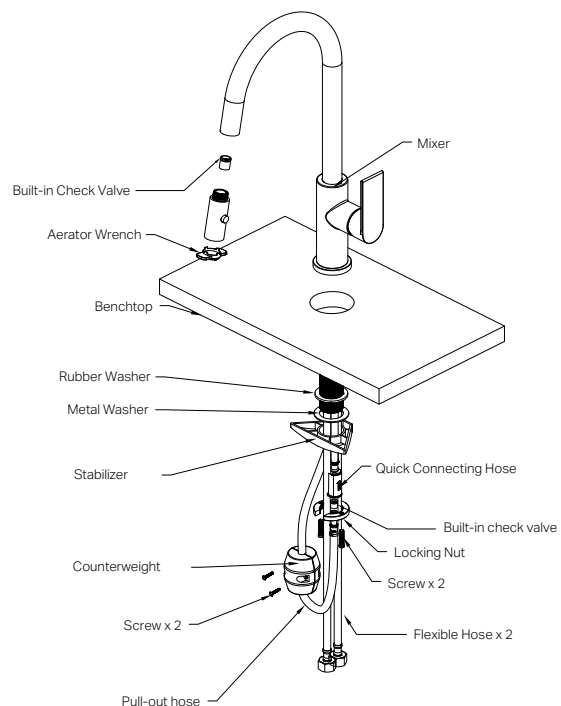


INSTALL THE MIXER




01. Pre-drill or create a mounting hole with a diameter of 35mm in the benchtop.

Note: If the stabilizer is used, the maximum benchtop thickness should not exceed 30mm. Without the stabilizer, the benchtop thickness can be up to 40mm.

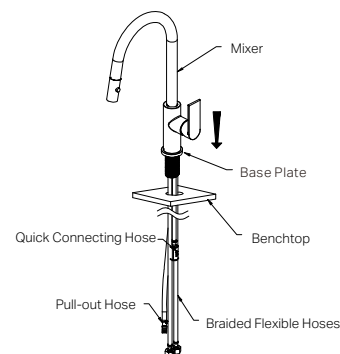


02. Attach the base plate, threaded tube to mixer body, screw the braided flexible hoses into the bottom of the mixer body through the mounting hole.


NOTE: Ensuring the O-ring sits within the bottom groove of the Base Plate to prevent water leakage.

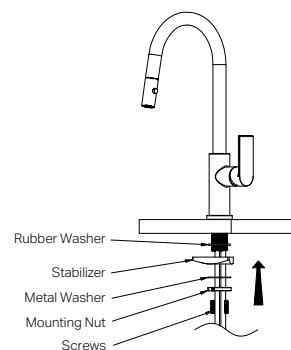

03. Slide the rubber washer (Stabilizer if needed) and metal washer over the threaded tube, secure the mixer firmly to the benchtop with locking nut and screws.

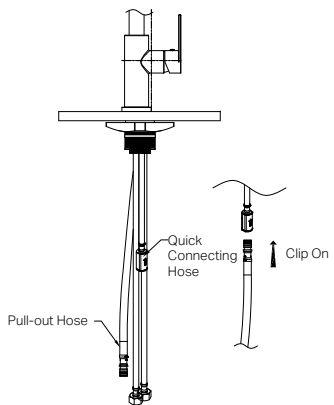

04. Connect the pull-out hose to the quick connecting hose.

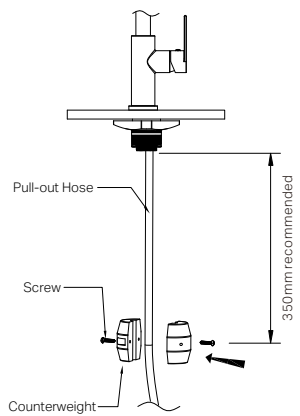

05. Install the counterweight onto the pull-out hose using the screws provided. It is recommended to position the counterweight approximately 300mm below the base of the mixer.

06. Connect the flexible hoses to the corresponding hot and cold water supply valves.

07. Check all connections for leaks. If any fittings are leaking, shut off the water as necessary to stop the leaks. Contact the supplier for warranty claim.

MAINTENANCE AND CARE:

- Regularly check the mixer and connections for signs of wear or leaks.
- Clean the tap with mild soapy water to maintain its appearance, avoiding harsh chemicals and abrasive materials.

Nero

