



York

Wall Basin Set II

Nero

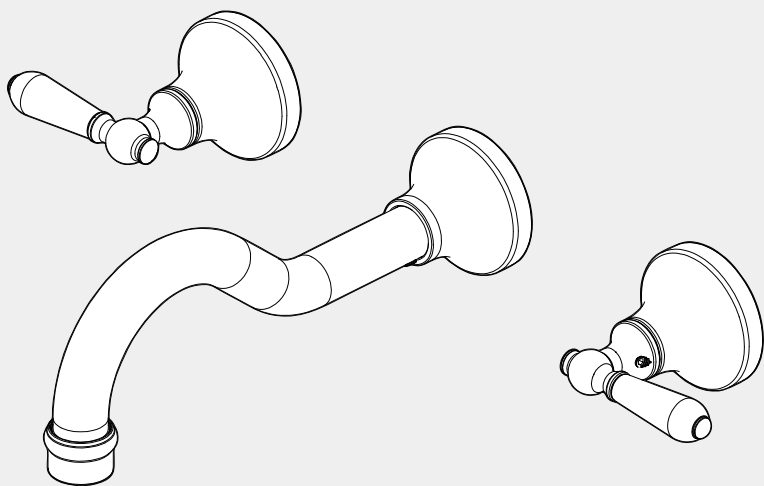

Version:202607

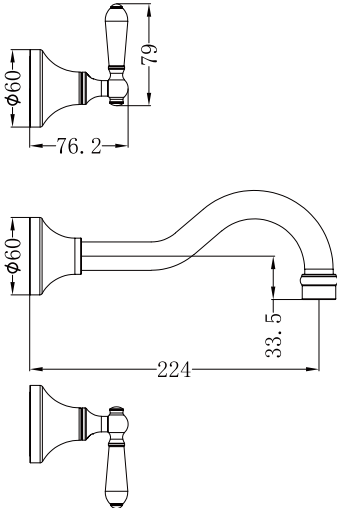Drawing	Specifications	Packaging Includes																				
	Watermark License WM-060073 Temperature Rating Min 1°C-Max 75°C Pressure Rating Min 150kpa - Max 500kpa	1x Spout 2x Wall Top Handles 1x Non-Restricting Aerator																				
	Finish & SKU <table><tr><td></td><td>CHROME WITH WHITE PORCELAIN Lever NR692107c01CH</td><td></td><td>CHROME WITH METAL Lever NR692107c02CH</td></tr><tr><td></td><td>MATTE BLACK WITH WHITE PORCELAIN Lever NR692107c01MB</td><td></td><td>MATTE BLACK WITH METAL Lever NR692107c02MB</td></tr><tr><td></td><td>AGED BRASS WITH WHITE PORCELAIN Lever NR692107c01AB</td><td></td><td>AGED BRASS WITH METAL Lever NR692107c02AB</td></tr><tr><td></td><td>BRUSHED NICKEL WITH WHITE PORCELAIN Lever NR692107c01BN</td><td></td><td>BRUSHED NICKEL WITH METAL Lever NR692107c02BN</td></tr><tr><td></td><td>CHROME WITH BLACK PORCELAIN Lever NR692107c03CH</td><td></td><td></td></tr></table>		CHROME WITH WHITE PORCELAIN Lever NR692107c01CH		CHROME WITH METAL Lever NR692107c02CH		MATTE BLACK WITH WHITE PORCELAIN Lever NR692107c01MB		MATTE BLACK WITH METAL Lever NR692107c02MB		AGED BRASS WITH WHITE PORCELAIN Lever NR692107c01AB		AGED BRASS WITH METAL Lever NR692107c02AB		BRUSHED NICKEL WITH WHITE PORCELAIN Lever NR692107c01BN		BRUSHED NICKEL WITH METAL Lever NR692107c02BN		CHROME WITH BLACK PORCELAIN Lever NR692107c03CH			
	CHROME WITH WHITE PORCELAIN Lever NR692107c01CH		CHROME WITH METAL Lever NR692107c02CH																			
	MATTE BLACK WITH WHITE PORCELAIN Lever NR692107c01MB		MATTE BLACK WITH METAL Lever NR692107c02MB																			
	AGED BRASS WITH WHITE PORCELAIN Lever NR692107c01AB		AGED BRASS WITH METAL Lever NR692107c02AB																			
	BRUSHED NICKEL WITH WHITE PORCELAIN Lever NR692107c01BN		BRUSHED NICKEL WITH METAL Lever NR692107c02BN																			
	CHROME WITH BLACK PORCELAIN Lever NR692107c03CH																					

*Dimensions are nominal measurements only
**Includes an additional non-restricting aerator for bath use

Note: In Wall Body/ Breech Not Included.

1

1x grub screw

1x left handle

1x right handle

1x grub screw

2x lock nuts

2x washers

2*quick-opening vales

1x adaptor

1x dressing bell

2x grub screws

1x spout

2x washers

2x dressing bells

2*plates

1 cutting guage

1 wrench

2

Install the breech (not included) in advance.

3

1) Position the quick-opening valve to the breech body, and screw it in place tightly.
2) Slide the washer onto the valve's end, secure with the locking nut. Ensure all parts are snug.
3) Test for leaks.

4

Screw the plate and cutting gauge onto the lock nut tightly, ensuring a secure fit.

5

1) Trim the excess thread flush with the cutting gauge.
2) Smooth the trimmed edge.
3) Test for leaks.

6

1) Remove the cutting gauge.
2) Attach the dressing bell.
3) Place the washer inside the handle, fit it onto the tap body, and secure with the grub screw.

7

1) Secure the adapter to the water outlet with Teflon tape. Note: Length of the water outlet is 19mm max.
2) Fit the dressing bell over the adapter.
3) Slide the spout into the dressing bell and fasten using the grub screw.
4) Test for leaks.

8

Position the handles as shown in the image.

Nero

