



York Wall Top Assemblies II

Nero




Lead Free

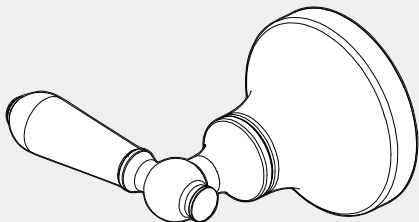

Version: 202607

Drawing

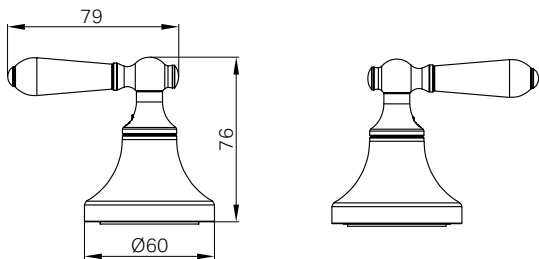

Note:
1. In Wall Body/ Breech Not Included.
2. Only suitable for Horizontal installation only.

Specifications

Watermark License

WM-060073

Temperature Rating

Min 1 °C- Max 75 °C

Pressure Rating

Min 150kpa - Max 500kpa

Packaging Includes

2x Wall Top Handles



CHROME WITH WHITE PORCELAIN LEVER
NR692109c01CH



MATTE BLACK WITH WHITE PORCELAIN LEVER
NR692109c01MB



AGED BRASS WITH WHITE PORCELAIN LEVER
NR692109c01AB



BRUSHED NICKEL WITH WHITE PORCELAIN LEVER
NR692109c01BN



CHROME WITH BLACK PORCELAIN LEVER
NR692109c03CH



CHROME WITH METAL LEVER
NR692109c02CH



MATTE BLACK WITH METAL LEVER
NR692109c02MB




AGED BRASS WITH METAL LEVER
NR692109c02AB




BRUSHED NICKEL WITH METAL LEVER
NR692109c02BN

*Dimensions are nominal measurements only.


1



1x grub screw



1x left handle



1x right handle



1x grub screw



2x lock nuts



2x washers



2*quick-opening vales



2*plates



2x washers



2x dressing bells




1 cutting guage




1 wrench

2

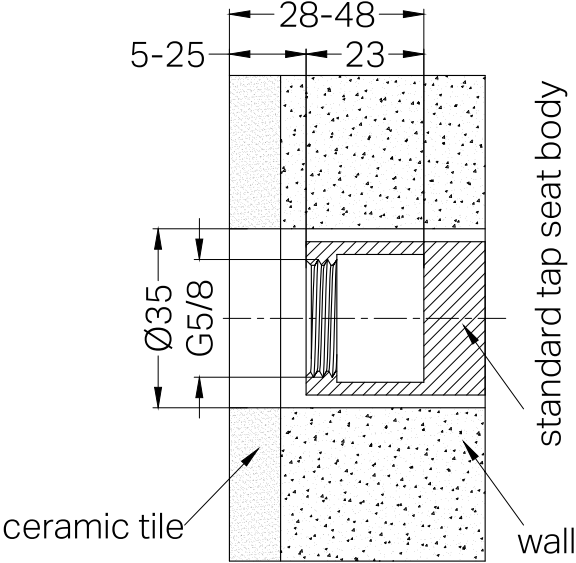

Install the breech (not included) in advance.

3

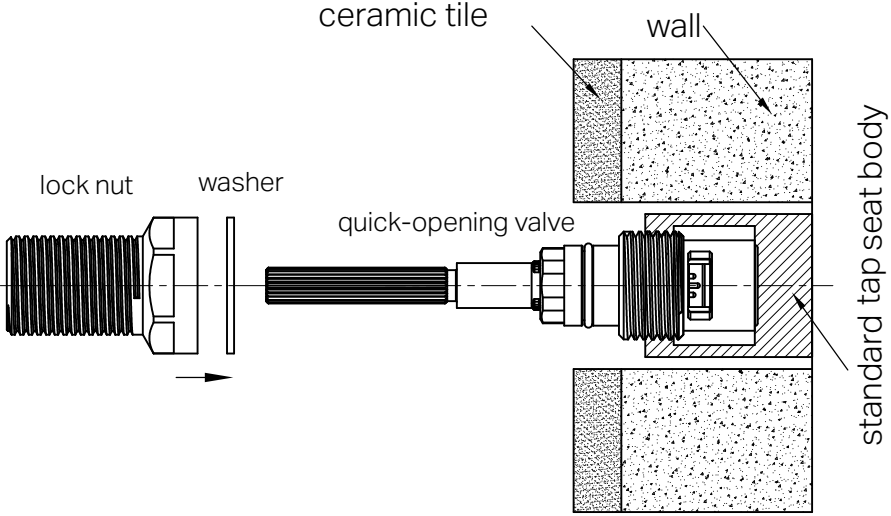


1) Position the quick-opening valve to the breech body, and screw it in place tightly.

2) Slide the washer onto the valve's end, secure with the locking nut. Ensure all parts are snug.


3) Test for leaks.

4

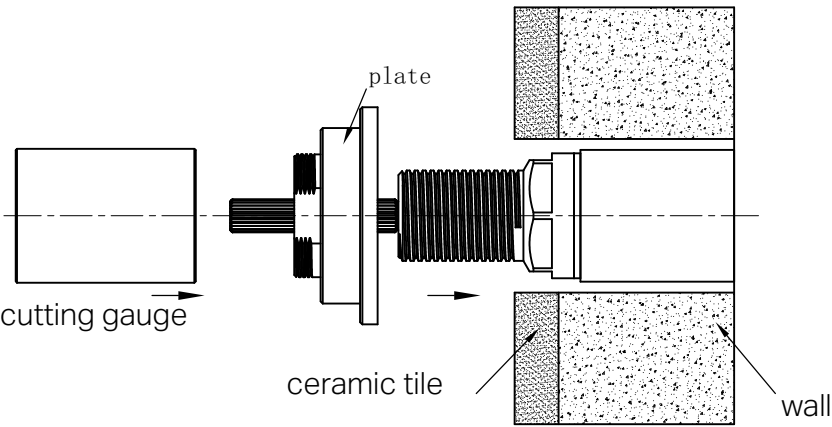

Screw the plate and cutting gauge onto the lock nut tightly, ensuring a secure fit.

5

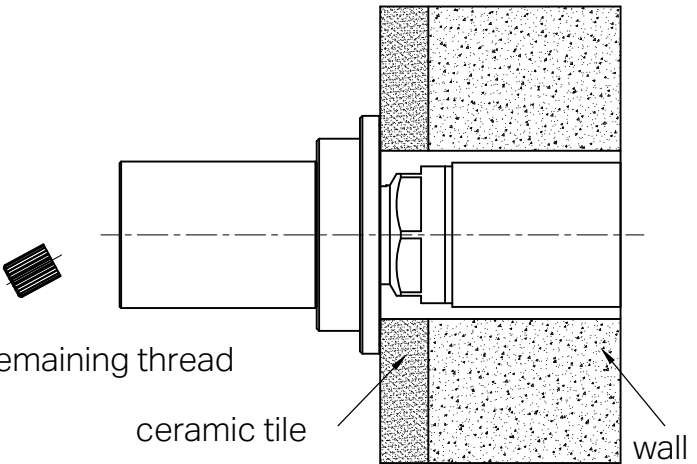


1) Trim the excess thread flush with the cutting gauge.

2) Smooth the trimmed edge.

3) Test for leaks.

6

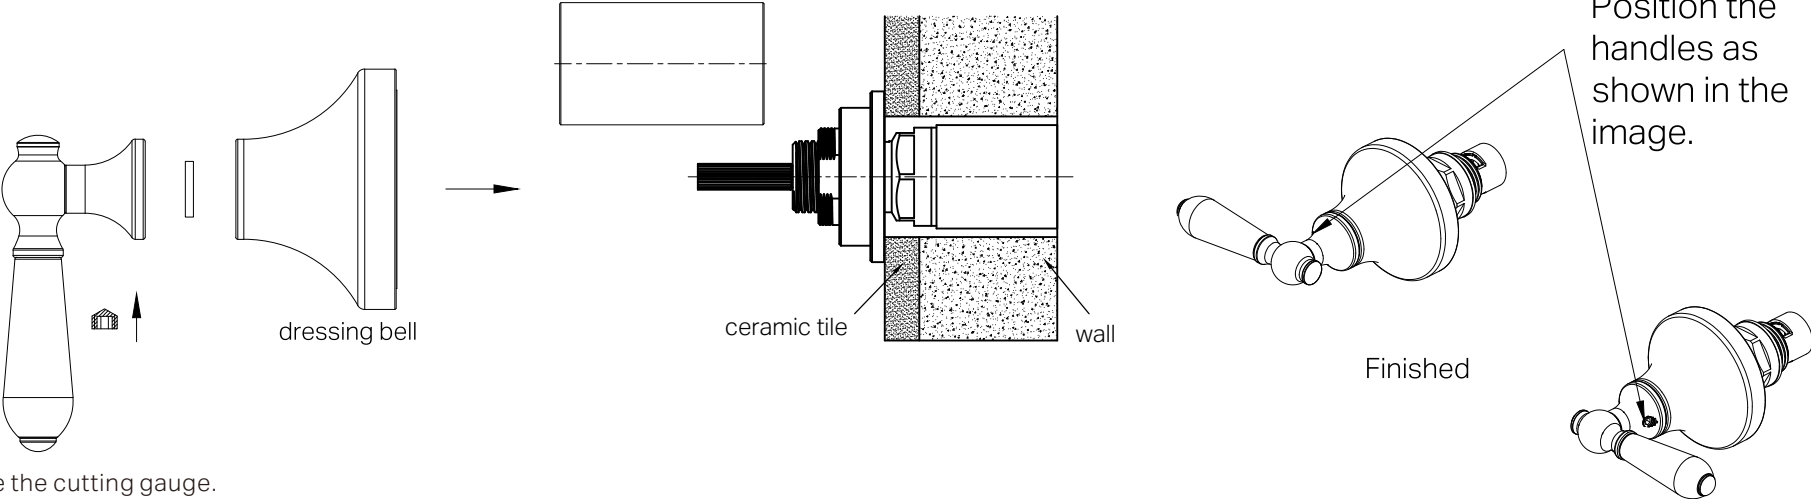

1) Remove the cutting gauge.

2) Attach the dressing bell.

3) Place the washer inside the handle, fit it onto the tap body, and secure with the grub screw.

Position the handles as shown in the image.

Nero

