


Dolce II

Basin/Bath Spout Only

Nero




Lead Free

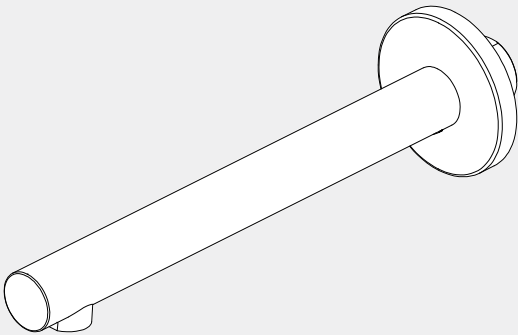

Version : 202506



Drawing

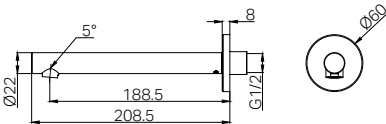






Specifications

Watermark License
WM-060073
Temperature Rating
Min 1 °C - Max 75 °C
Pressure Rating
Min 150kpa - Max 500kpa

Packing Includes

1 x Spout
1 x Back Plate
1 x Extra Aerator(Without Flow Restrictor)

Finish & SKU

- | | | |
|---------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
|  Chrome
25B013CH |  Matte Black
25B013MB |  Gun Metal
25B013GM |
|  Brushed Gold
25B013BG |  Brushed Nickel
25B013BN | |



*Dimensions are nominal measurements only.

INSTALLATION INSTRUCTIONS

GENERAL INSTRUCTIONS:


- This product must be installed by a licensed plumber. Ensure that your plumbing installation complies with the Australian/New Zealand Standard AS/NZS 3500.
- All pipework must be thoroughly flushed prior to the installation of the mixer. In-line filters must be fitted on both hot and cold supplies to prevent foreign particles from damaging the ceramic cartridge.
- All outlets used primarily for personal hygiene must deliver water at a safe temperature in accordance with regional regulations.

STEPS TO INSTALL THE TRIM KITS




1. Cut the G1/2 thread to ensure that the product sits flush with the wall after installation.

2. Unscrew the two grub screws, then remove the spout adapter from the spout.




3. Screw the G1/2 spout adapter onto the outlet thread and ensure the flat washer is placed inside, as shown in the diagram.



4. Fit the back plate onto the spout adapter.

5. Place the ABS washer against the back plate.

6. Push the spout onto the spout adapter and secure it by tightening the two grub screws on the underside of the spout using an Allen key. (Ensure the screws are tightened firmly but do not over-tighten)

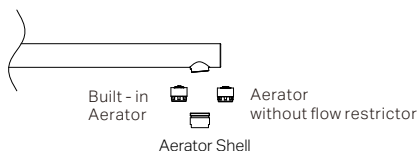

Note:

The built-in aerator is equipped with an internal flow restrictor, while the extra aerator included in the box does not have one. You can switch them based on your needs.

FINAL INSPECTION:

- Ensure the tap operates smoothly and that there are no leaks at the connections.
- Clean the area and the newly installed tap with a soft cloth to remove any installation residues.

MAINTENANCE AND CARE:

- Regularly check the mixer and connections for signs of wear or leaks.
- Clean the tap with mild soapy water to maintain its appearance, avoiding harsh chemicals and abrasive materials that may damage the finish.

Nero

