


Dolce II Tall Basin Mixer Curved Spout

Nero




Lead Free

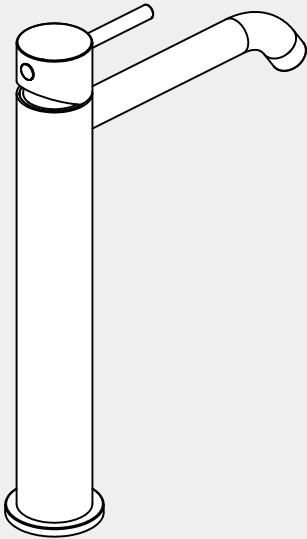

Version:202603



Drawing

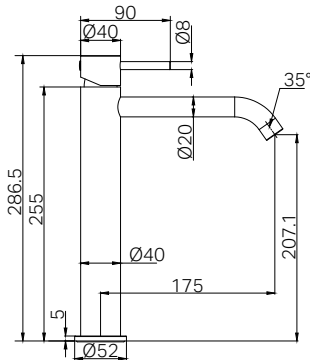

Specifications

Watermark License
WM-060073
Temperature Rating
Min 1 °C - Max 75 °C
Pressure Rating
Min 150kpa - Max 500kpa

Packing Includes

1X Body
1X Installation Kits

Finish & SKU

 **Chrome**
25B015CH

 **Gun Metal**
25B015GM

 **Brushed Nickel**
25B015BN

 **Matte Black**
25B015MB


 **Brushed Gold**
25B015BG

*Dimensions are nominal measurements only.


Installation Instructions

GENERAL INSTRUCTIONS

- This product must be installed by a licensed plumber. Ensure that your plumbing installation conforms to the Australian/New Zealand Standard AS/NZS 3500.
- All pipework must be thoroughly flushed prior to the installation of the mixer. In-line filters must be fitted on both hot and cold supplies to prevent foreign particles from damaging the ceramic cartridge.
- All outlets used primarily for personal hygiene must deliver water at a safe temperature in accordance with regional regulations.

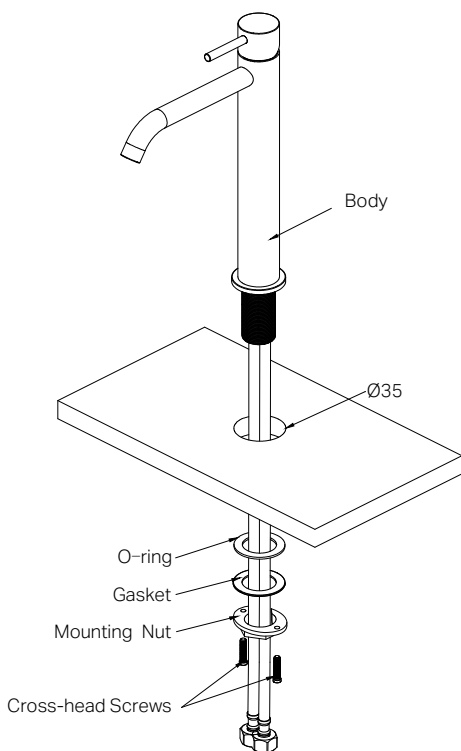


Installation Steps

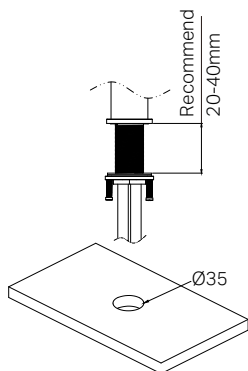


1. The recommended thickness of the tabletop is 20-40mm.

Drill a Ø35 hole at the intended installation location.

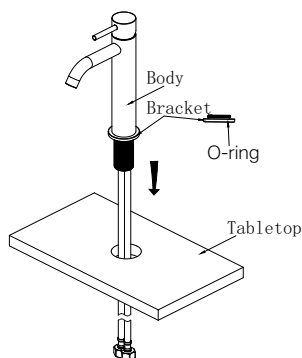

2. Install the body through the hole and make sure there is an O-ring in the bracket.

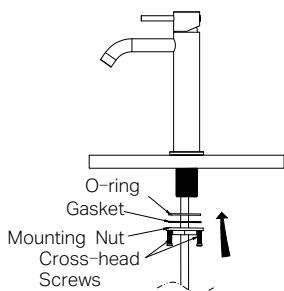

3. Install the O-ring, gasket and the mounting nut in the order shown. Apply the cross-head screws to tighten the body.

MAINTENANCE AND CARE:

- Regularly check the mixer and connections for signs of wear or leaks.
- Clean the tap with mild soapy water to maintain its appearance, avoiding harsh chemicals and abrasive materials that may damage the finish.

FINAL INSPECTION:

- Ensure the tap operates smoothly and that there are no leaks at the connections.
- Clean the area and the newly installed tap with a soft cloth to remove any installation residues.

Nero

