



Bidet Sprayer

Nero

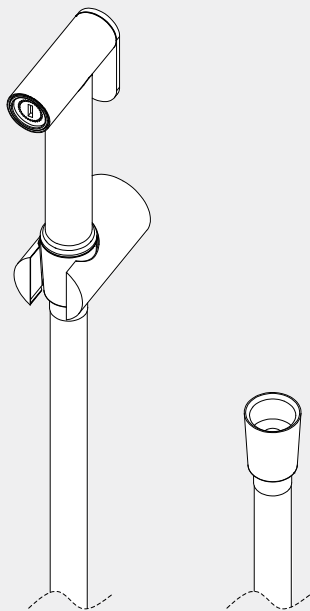

Version : 202506

Drawing



Specifications

Temperature Rating
Min 1 °C - Max 75 °C
Pressure Rating
Min 150kpa - Max 500kpa

Packing Includes

1 x Bidet Sprayer
(with built-in check valve)
1 x Mounting Bracket
1 x 1m Flexible Hose
1 x Installation Kits

Finish & SKU



- | | | |
|----------------------------------|-------------------------------------|-------------------------------------|
| Chrome
NR202412CH | Gun Metal
NR202412GM | Brushed Bronze
NR202412BZ |
| Matte Black
NR202412MB | Brushed Gold
NR202412BG | Matte White
NR202412MW |
| Graphite
NR202412GR | Brushed Nickel
NR202412BN | |

*Dimensions are nominal measurements only.


INSTALLATION INSTRUCTIONS

GENERAL INSTRUCTIONS:


- This product must be installed by a licensed plumber.
- All pipework must be thoroughly flushed prior to installation, as foreign materials may block the outlet, thereby reducing water flow.
- Ensure that all outlets used for personal hygiene deliver water at a safe temperature in accordance with regional regulations.
- Verify that the water pressure is within the recommended range for the sprayer to function properly.

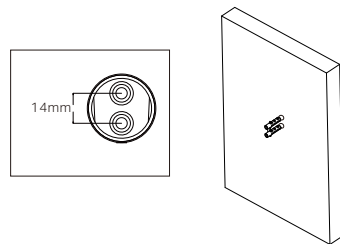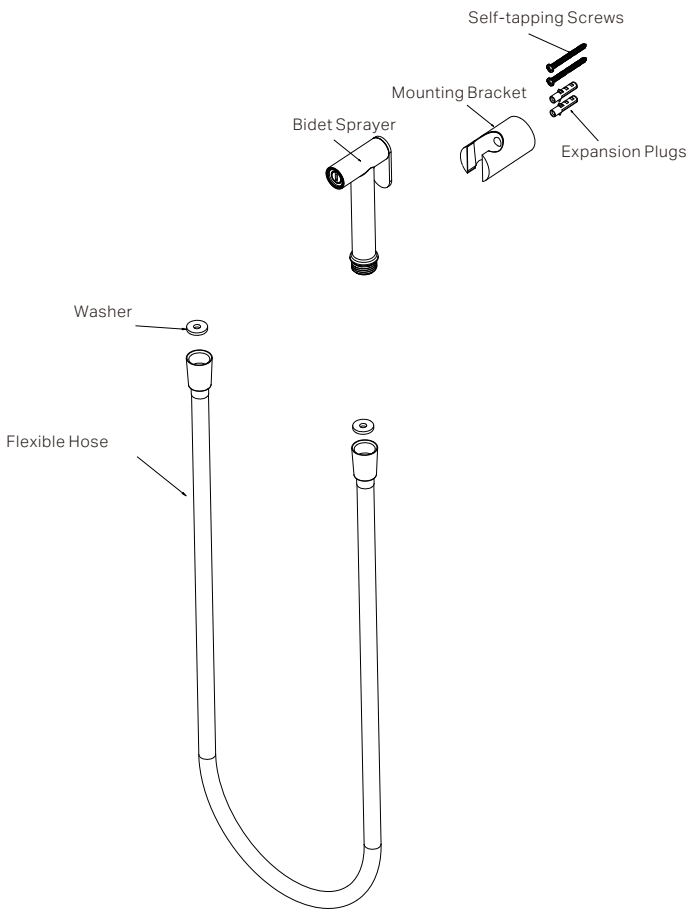

01. Pre-drill or create two 6mm diameter mounting holes with a gap of 14mm. Press in the expansion plugs.

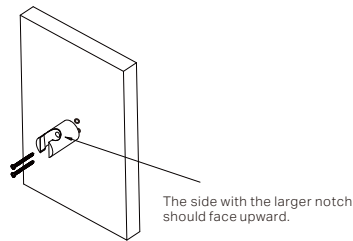

02. Fix the bracket using self-tapping screws screwed into the expansion plugs.
Note:
Ensure the bracket is installed in the correct orientation.

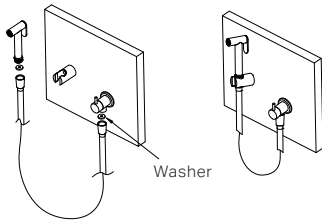

03. Connect the sprayer to angle valve with flexible hose. (Please be aware that the products we sell do not include the angle valve.)
Note: Do not let the washers at both ends of the hose fall off during installation.
Turn on the valve and check for any leaks.

Warning: Please close the angle valve when not in use to avoid the risk of hose rupture. Such situations are not covered under warranty.

Nero

