


Tile Insert V Channel

800x106 mm Floor Grate


80/90mm Outlet

Nero

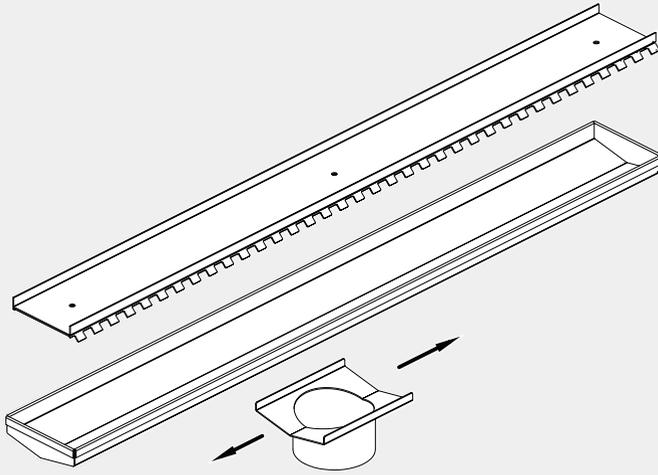

Version : 202512

Drawing

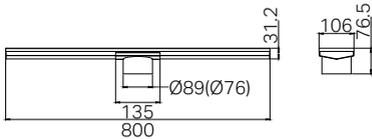

Specifications

Watermark License

WM-032203

Finish & SKU

With 90mm Outlet

- Brushed Nickel**
- NRFG010HSBN
- Matte Black**
- NRFG010HSMB

- Gun Metal**
- NRFG010HSGM
- Brushed Gold**
- NRFG010HSBG

- Brushed Bronze**
- NRFG010HSBZ

With 80mm Outlet

- Brushed Nickel**
- NRFG012HSBN
- Matte Black**
- NRFG012HSMB

- Gun Metal**
- NRFG012HSGM
- Brushed Gold**
- NRFG012HSBG

- Brushed Bronze**
- NRFG012HSBZ

Packaging Includes

- 1x Floor Grate
- 1x 90mm Outlet or
- 80mm Outlet

*Dimensions are nominal measurements only

INSTALLATION INSTRUCTIONS


GENERAL INFORMATION

- This product must be installed by a licensed plumber. Ensure that your plumbing installation complies with the Australian/New Zealand Standard AS/NZS 3500.
- Do not pour concrete around floor grate. Use timber formwork and install the grate only after concrete has been fully cured.
- Apply a waterproof membrane compliant with AS 3740 between the substrate and finished tile surface before laying tiles.


IMPORTANT NOTES FOR INSTALLATION

- Confirm a puddle flange has been correctly installed and is compatible with the outlet pipe.
- Reserve sufficient installation space around the outlet.
- Ensure all parts are clean and free from debris, adhesive or sealant.
- Use UV- and weather-resistant sealants for all external sealing.


INSTALLATION STEPS




01. Confirm a puddle flange has been correctly installed and is compatible with the outlet pipe.

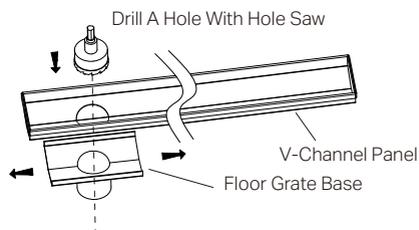

02. Drill a hole in the V-Channel Panel using a hole saw, aligned to the drainage point.

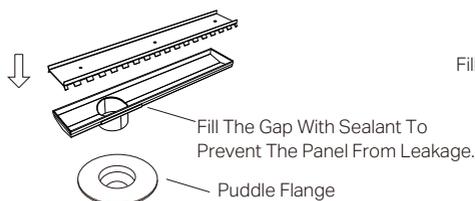

03. Install all the parts as shown in the diagram.
NOTE: Seal around the contact area with sanitary-grade silicone.

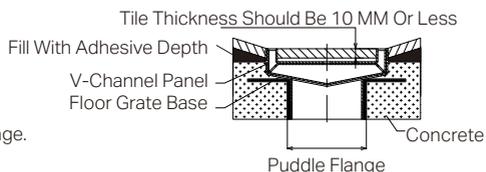

04. Lay the floor tiles and ensure the tiles have an appropriate slope toward the floor grate to make the water flow efficiently into the grate.
NOTE: The thickness of the tile should not exceed 10mm.

Final Placement and Cleaning

Clean up and check for leaks.

MAINTENANCE AND CARE

- Clean the grate with a soft cloth or non-abrasive brush.
- Avoid sharp or metallic tools when clearing blockages.
- If clogging occurs, use a plunger or soft drain snake.
- Do not use harsh chemical cleaners which may damage the finish or membrane.

Nero

