


# Mecca Shower Rail With Air Shower


Nero



Versions:202506

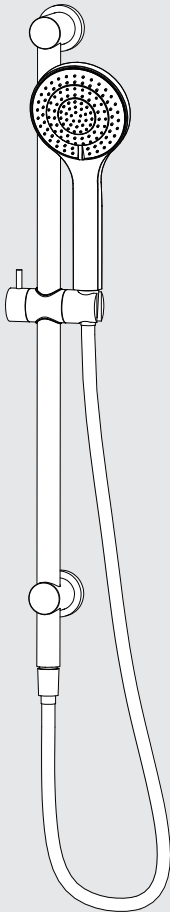

## Drawing

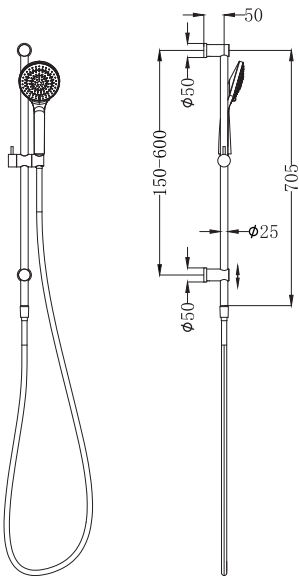

## Specifications

**Watermark License**  
WM-060093  
**Temperature Rating**  
Min 1 °C-Max 75 °C  
**Pressure Rating**  
Min 150kpa - Max 500kpa

## Packaging Includes

- 1x Hand Shower ( Built- In Check Valve)
- 1x Shower Rail
- 1x Adapter
- 1x Shower Bracket
- 1x 1.5m PVC Hose
- 2x Back Plates


## Finish & SKU

- |   |  |  |
|---|--|--|
|  <b>Chrome</b><br>NR221905aCH      |  <b>Matte White</b><br>NR221905aMW  |  <b>Brushed Nickel</b><br>NR221905aBN |
|  <b>Matte Black</b><br>NR221905aMB |  <b>Brushed Gold</b><br>NR221905aBG |  |


\*Dimensions are nominal measurements only.

Important


All products must be installed by licensed plumbers.  
All pipework must be thoroughly flushed prior to installation, as foreign materials may block the flow regulating device and reduce the flow of water.

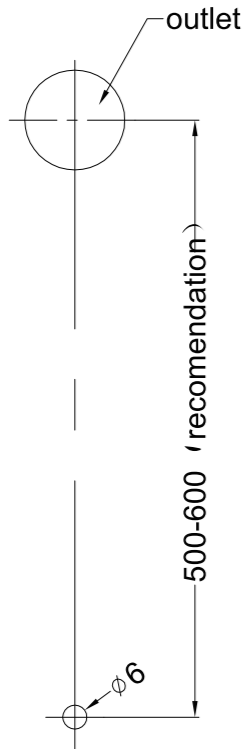


1. Drill a p6mm hole at the downwardsoutlet vertical downward positionin the recomendation range.

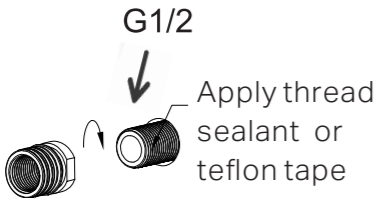


2. Screw the adapter onto the outlet. Push wall plug into drilled hole. Fit lower mounting pillar in place with screw. Tighten firmly.

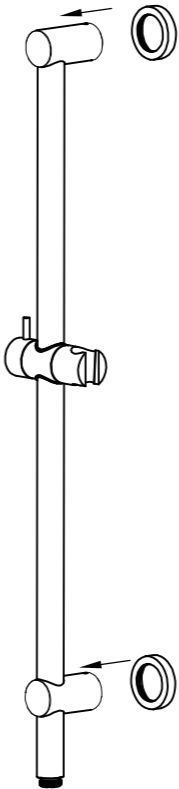

3. Slide both top and bottom back plate onto the rail assembly, as shown on the picture.

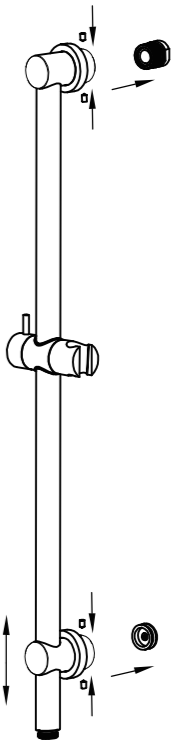

4. Push shower rail assembly onto the wall/tile face. Tighten grub screws firmly. Slide the back plates against the wall/tile face properly.

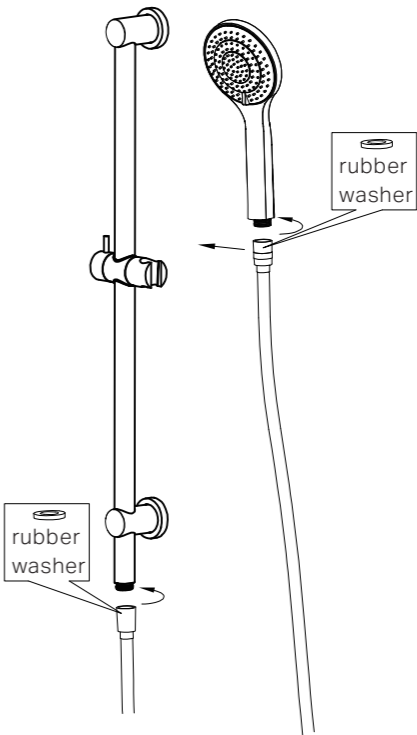

5. Connect shower rail and hand shower with hose. TEST & CHECK FOR LEAKS

Nero

