


# Mecca Shower Rail With Air Shower II


Nero



Versions:202506



Drawing

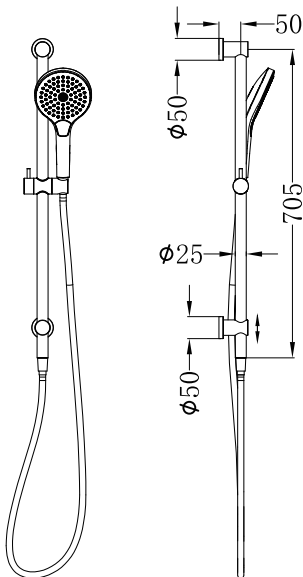






Specifications

**Watermark License**  
WM-060093  
**Temperature Rating**  
Min 1°C-Max 75°C  
**Pressure Rating**  
Min 150kpa - Max 500kpa

Packaging Includes

1x Hand Shower (Built- In Check Valve)  
1x 1.5m PVC Hose  
1x Shower Rail

Finish & SKU


- |                                                                                                                       |                                                                                                                        |                                                                                                                            |                                                                                                                            |
|-----------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
|  <b>Chrome</b><br>NR221905gCH      |  <b>Gun Metal</b><br>NR221905gGM    |  <b>Brushed Bronze</b><br>NR221905gBZ |  <b>Brushed Nickel</b><br>NR221905gBN |
|  <b>Matte Black</b><br>NR221905gMB |  <b>Brushed Gold</b><br>NR221905gBG |  <b>Matte White</b><br>NR221905gMW    |                                                                                                                            |

\*Dimensions are nominal measurements only.

Important

All products must be installed by licensed plumbers.


All pipework must be thoroughly flushed prior to installation, as foreign materials may block the flow regulating device and reduce the flow of water.

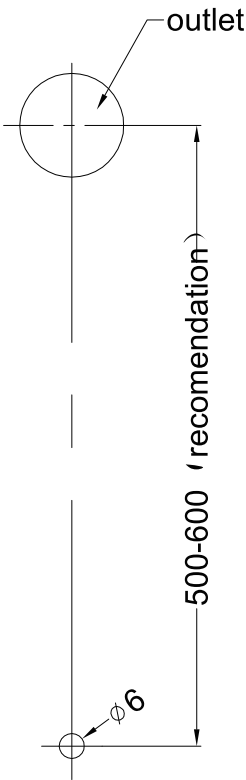


1. Drill a  $\phi 6$ mm hole at the downwards outlet vertical downward position in the recomendation range.




2. Screw the adapter onto the outlet. Push wall plug into drilled hole. Fit lower mounting pillar in place with screw. Tighten firmly.

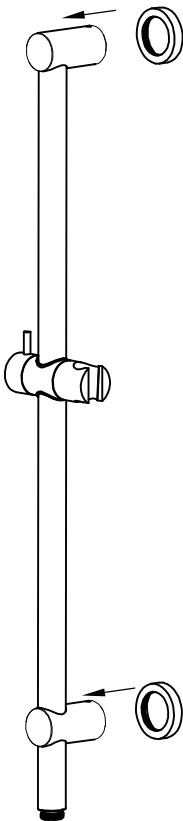

3. Slide both top and bottom back plate onto the rail assembly, as shown on the picture.

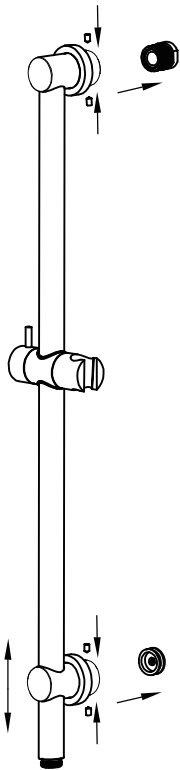

4. Push shower rail assembly onto the wall/tile face. Tighten grub screws firmly. Slide the back plates against the wall/tile face properly.

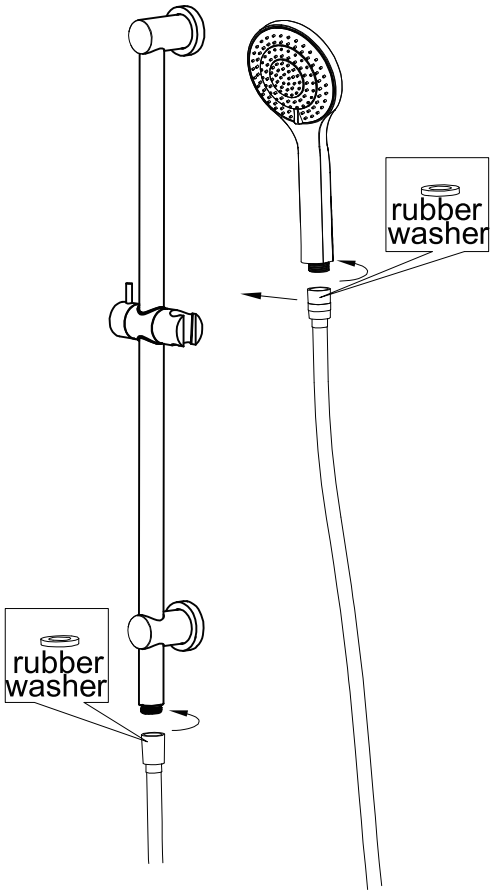

5. Connect shower rail and hand shower with hose. TEST & CHECK FOR LEAKS.

Nero

