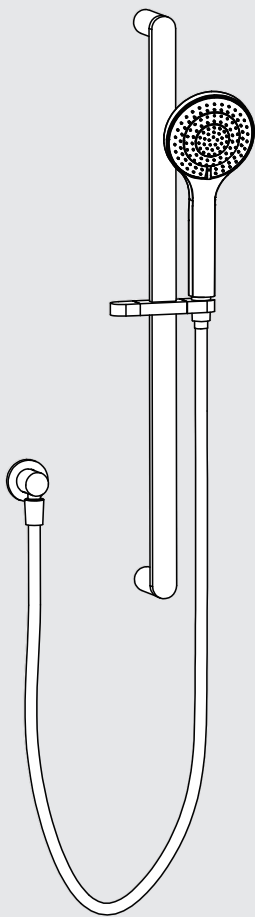


Ecco Shower Rail
With Air Shower

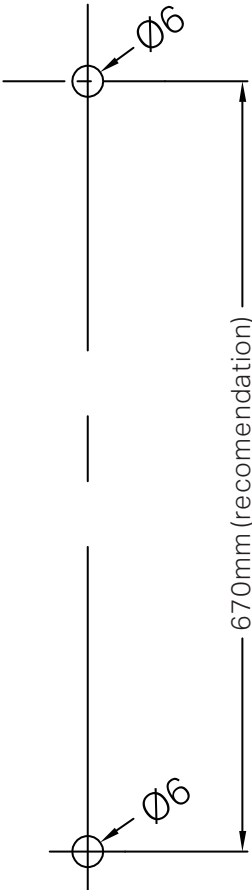


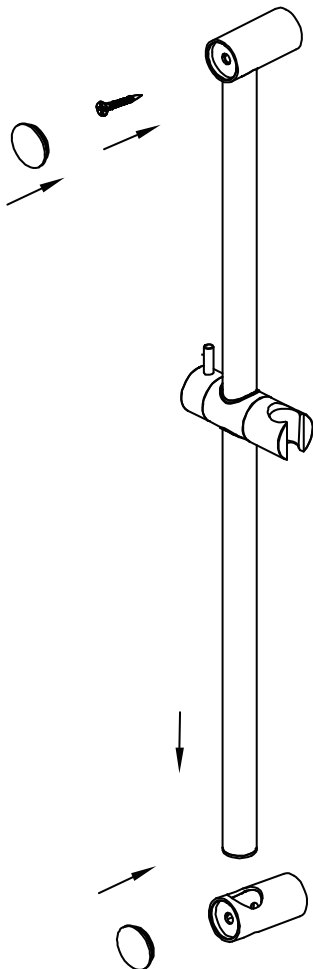
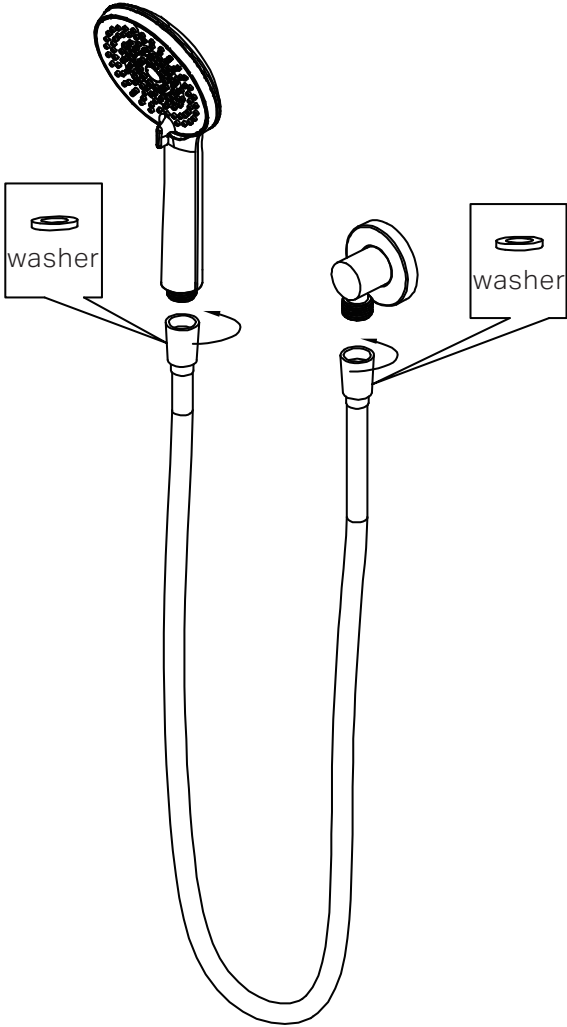
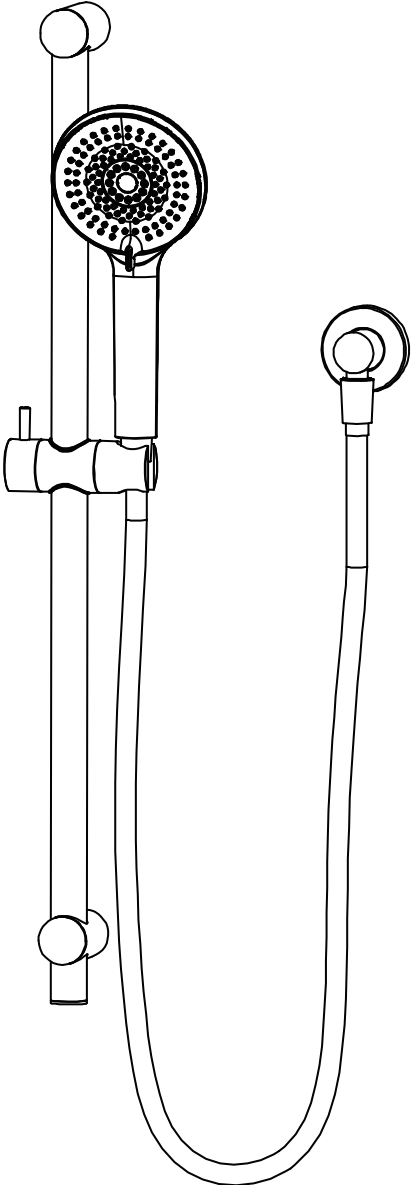
Nero



Versions:202506



Drawing	Specifications	Packaging Includes						
	Watermark License WM-060093 Temperature Rating Min 1°C-Max 75°C Pressure Rating Min 150kpa - Max 500kpa	1x Hand Shower 1x Shower Rail 2x Shower Bracket 1x Shower Elbow 1x 1.5m PVC Hose						
<table><tr><th colspan="3">Finish & SKU</th></tr><tr><td> Chrome NR30802CH</td><td> Matte Black NR30802MB</td><td> Brushed Nickel NR30802BN</td></tr></table>			Finish & SKU			Chrome NR30802CH	Matte Black NR30802MB	Brushed Nickel NR30802BN
Finish & SKU								
Chrome NR30802CH	Matte Black NR30802MB	Brushed Nickel NR30802BN						
*Dimensions are nominal measurements only.								

 use Teflon tape 1.Put Teflon tape on outlet thread.	 4.Drill two Ø6mm holes according to above picture.	 5.Mount bottom bracket on the Ø6 hole by expansion plug and tapping screw.
 2.Pull dressing ring on the elbow body.		
 3. Screw elbow body on to outlet.		
 6.Plug shower rail in bottom bracket. Mount top bracket on the top hole by expansion plug and tapping screw. Push plates onto two brackets.	 7.Connect hand shower with outlet by shower hose.	 8.Test for leaks.

Nero

