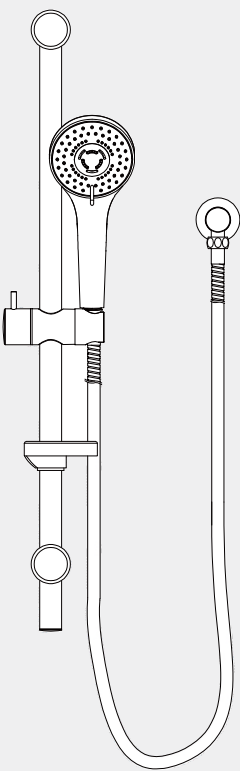


Builder Budget
Shower Rail

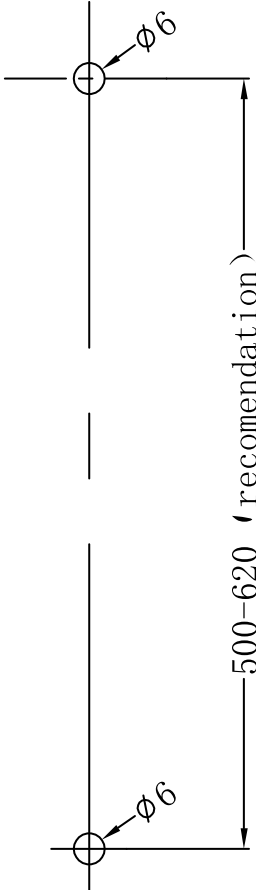


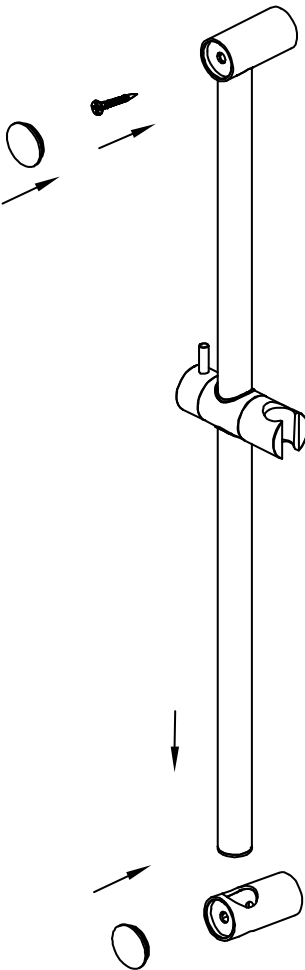
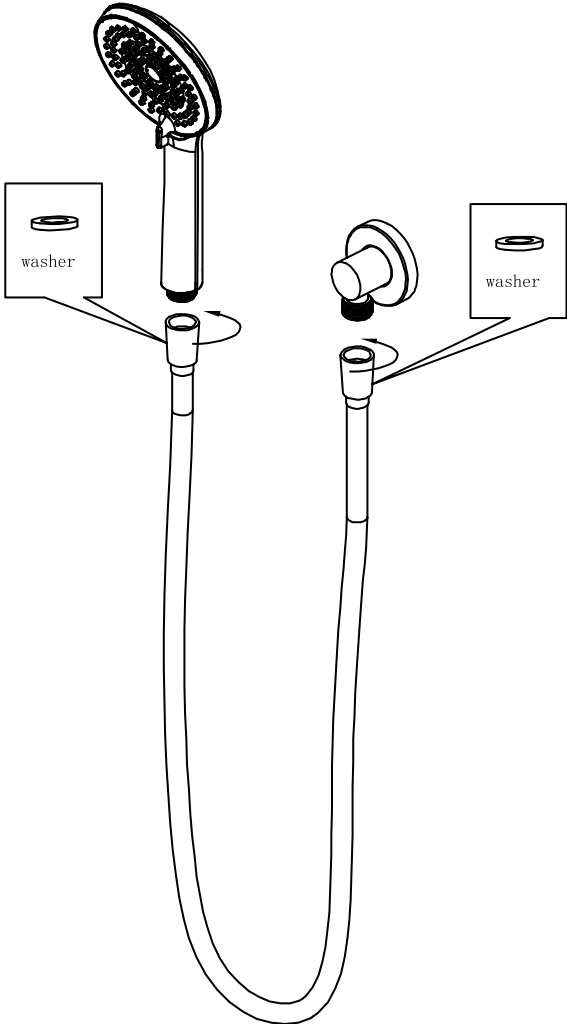
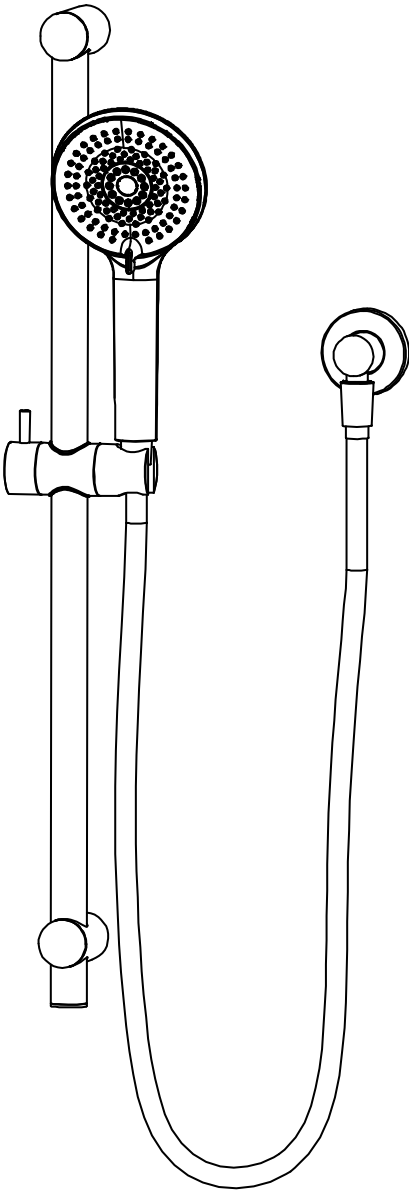
Nero



Versions:202401

Drawing	Specifications	Packaging Includes
Technical drawing of the shower rail showing front and side views with dimensions. Front view dimensions: total height 705, mounting hole spacing 500~620, top mounting hole diameter 80, top mounting hole offset 56.5, shower head diameter 96.6, shower head offset 40, shower head mounting hole diameter 25, shower head mounting hole offset 83, shower head mounting hole diameter 165.8, shower head mounting hole offset 45. Side view dimensions: shower head diameter 96.6, shower head offset 40, shower head mounting hole diameter 25, shower head mounting hole offset 83, shower head mounting hole diameter 165.8, shower head mounting hole offset 45.	Watermark License WM-060093 Temperature Rating Min 1°C-Max 75°C Pressure Rating Min 150kpa - Max 500kpa Finish & SKU Chrome NR315CH	Packaging Includes 1x Hand Shower (Built- In Check Valve) 1x Shower Hose 1x Elbow 1x Shower Rail

*Dimensions are nominal measurements only.

 use Teflon tape 1.Put Teflon tape on outlet thread.		
 2.Pull dressing ring on the elbow body.		
 3. Screw elbow body on to outlet.		5. Mount bottom bracket on the Ø6 hole by expansion plug and tapping screw.
 6.Plug shower rail in bottom bracket. Mount top bracket on the top hole by expansion plug and tapping screw. Push plates onto two brackets.	 7.Connect hand shower with outlet by shower hose	 8.Test for leaks.

Nero

