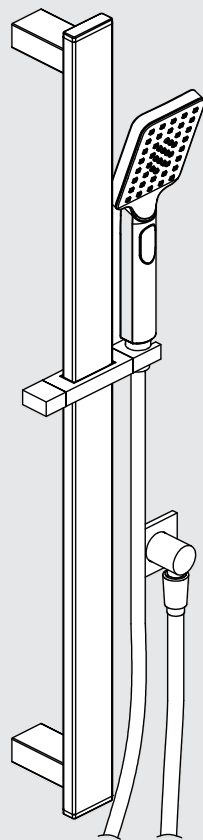


# Celia New Shower Rail

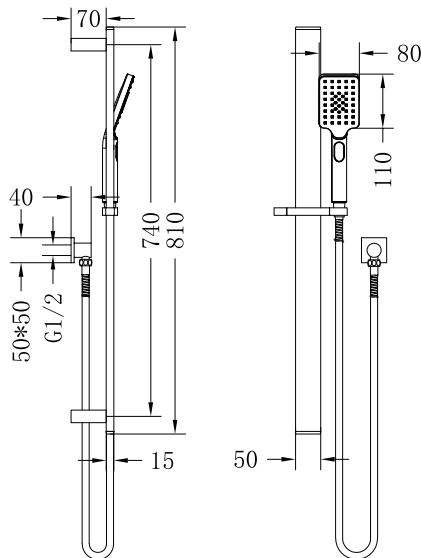
Nero



Versions:202506



## Drawing



## Specifications

**Watermark License**  
WM-060093  
**Temperature Rating**  
Min 1°C-Max 75°C  
**Pressure Rating**  
Min 150kpa - Max 500kpa


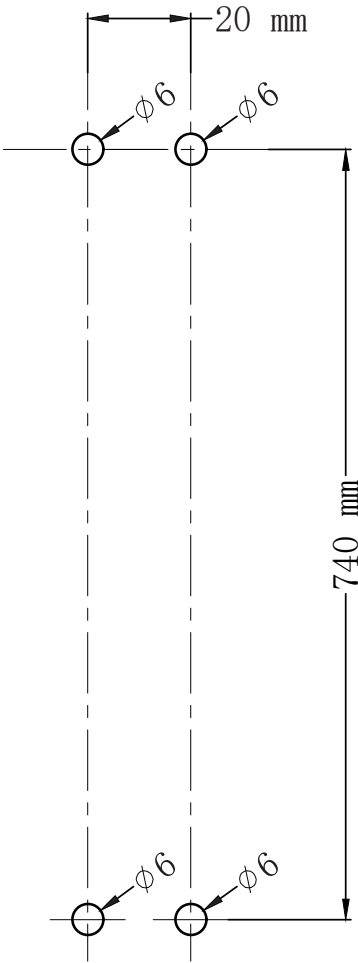



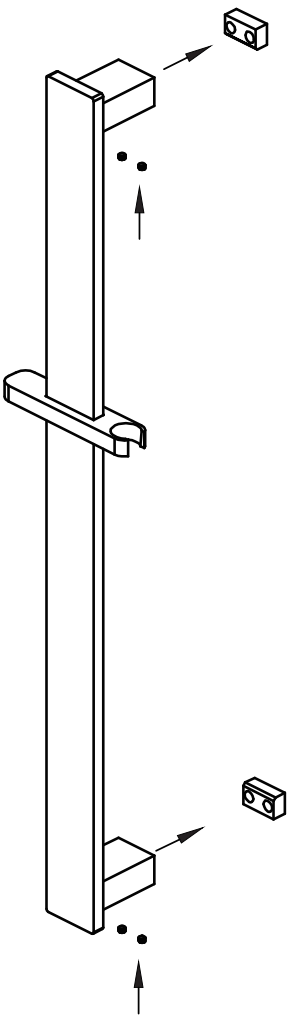
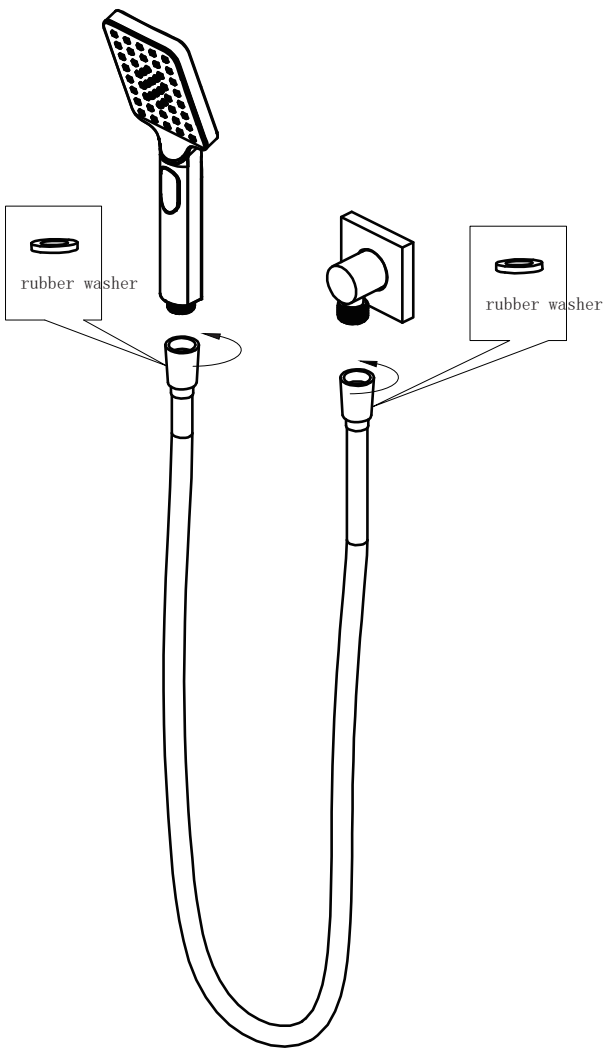
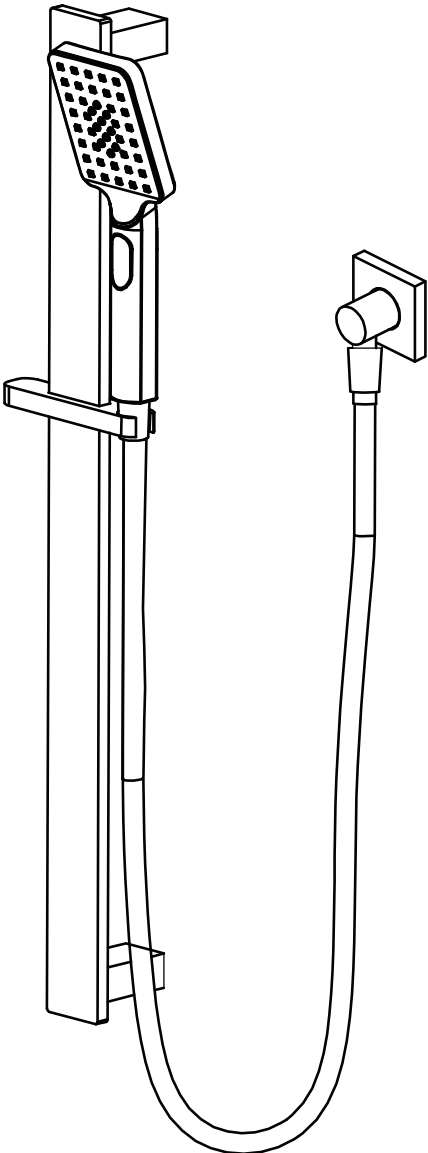
## Packaging Includes

- 1x Handle Shower (built-in Check Valve)
- 1x Shower Hose
- 1x Elbow
- 1x Shower Rail

## Finish & SKU

- |                               |                                |                                  |
|-------------------------------|--------------------------------|----------------------------------|
| <b>Chrome</b><br>NR316CH      | <b>Gun Metal</b><br>NR316GM    | <b>Brushed Nickel</b><br>NR316BN |
| <b>Matte Black</b><br>NR316MB | <b>Brushed Gold</b><br>NR316BG |                                  |

\*Dimensions are nominal measurements only.

<div></div> <div>1.Put Teflon tape on outlet thread.</div>	<div></div> <div>4.Drill four holes according to above picture.</div>	<div></div> <div>5.Make expansion plug into four holes and make brackets into holes by tapping screw.</div>
<div></div> <div>2.Pull dressing ring on the elbow body.</div>		
<div></div> <div>3.Screw elbow body on to outlet.</div>		
<div></div> <div>6.Install shower rail onto brackets,tighten four grub screws by hex wrench.</div>	<div></div> <div>7.Connect hand shower and elbow by shower hose. (Notes: there are two rubber washers in shower hose. )</div>	<div></div> <div>8.Test and check for leaks.</div>

Nero

