


Square Swivel Shower Arm

Nero

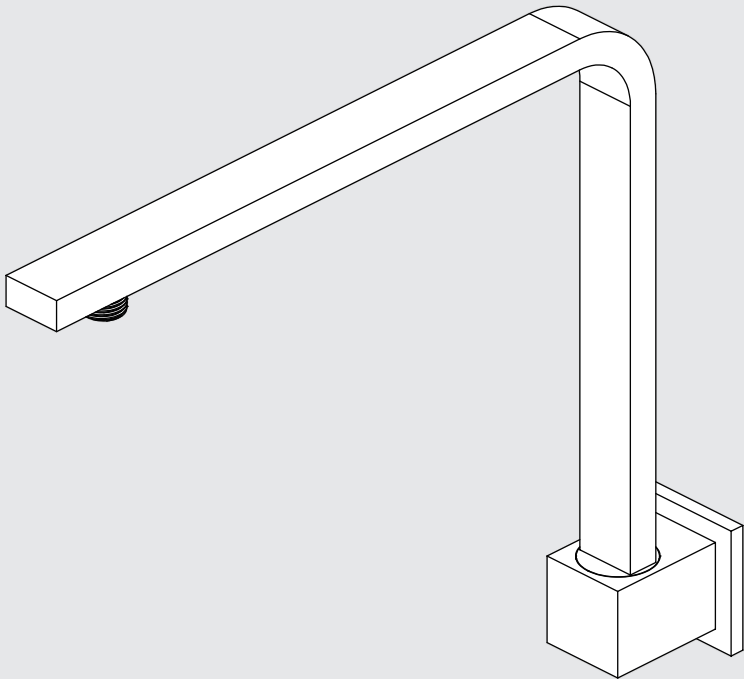


Versions:202506

Drawing	Specifications	Packaging Includes				
	Temperature Rating Min 1°C-Max 75°C	1x Shower Arm				
	Pressure Rating Min 150kpa - Max 500kpa					
	Finish & SKU <table><tr><td> Chrome NR505CH</td><td> Gun Metal NR505GM</td><td> Brushed Nickel NR505BN</td></tr><tr><td> Matte Black NR505MB</td><td> Brushed Gold NR505BG</td><td></td></tr></table>		Chrome NR505CH	Gun Metal NR505GM	Brushed Nickel NR505BN	Matte Black NR505MB
Chrome NR505CH	Gun Metal NR505GM	Brushed Nickel NR505BN				
Matte Black NR505MB	Brushed Gold NR505BG					

*Dimensions are nominal measurements only.

INSTALLATION

1

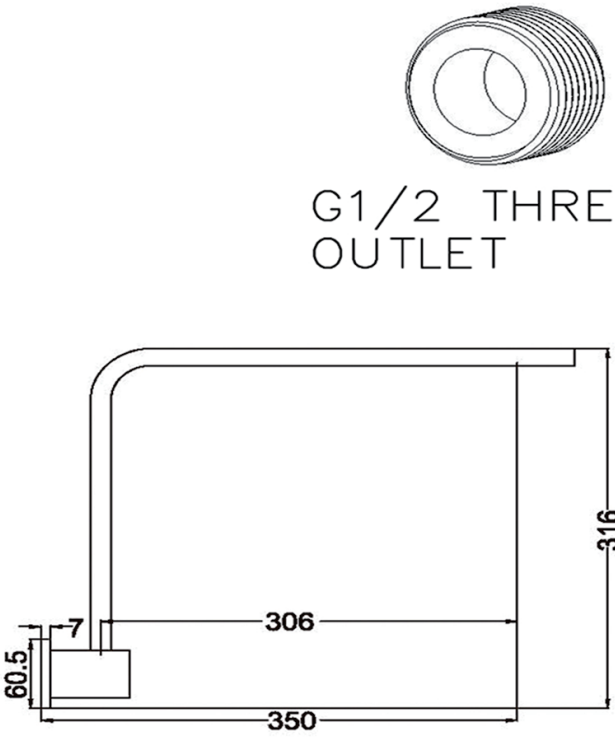

G1/2 THREAD
OUTLET

316


306

350

60.5


7

2

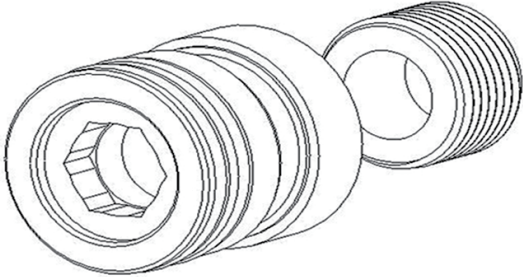


screw threaded adaptor to outlet
tighten firmly with allen key

3

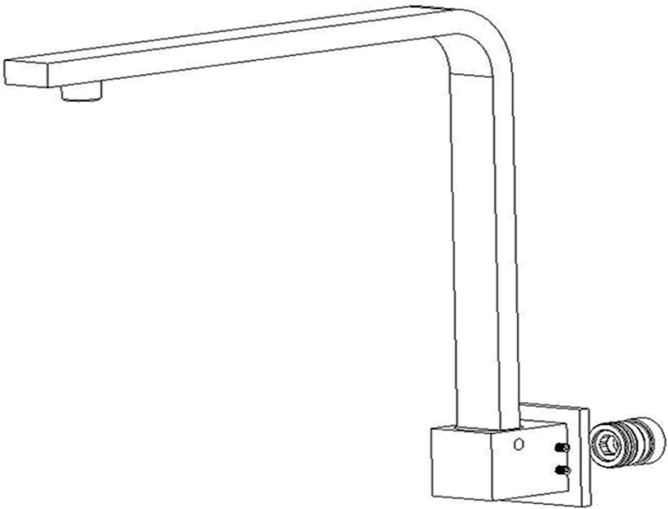


push YSW505 shower arm
cover on threaded adaptor.

4

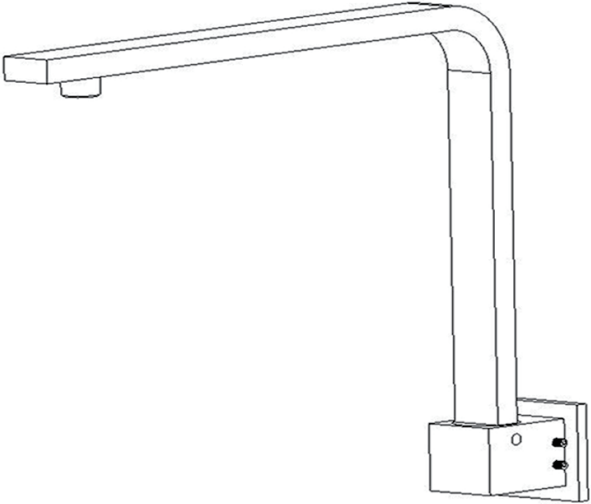


tighten grub screws

5

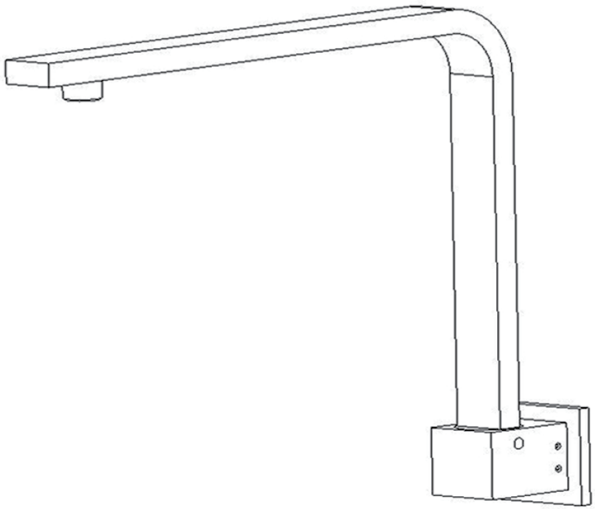

finish

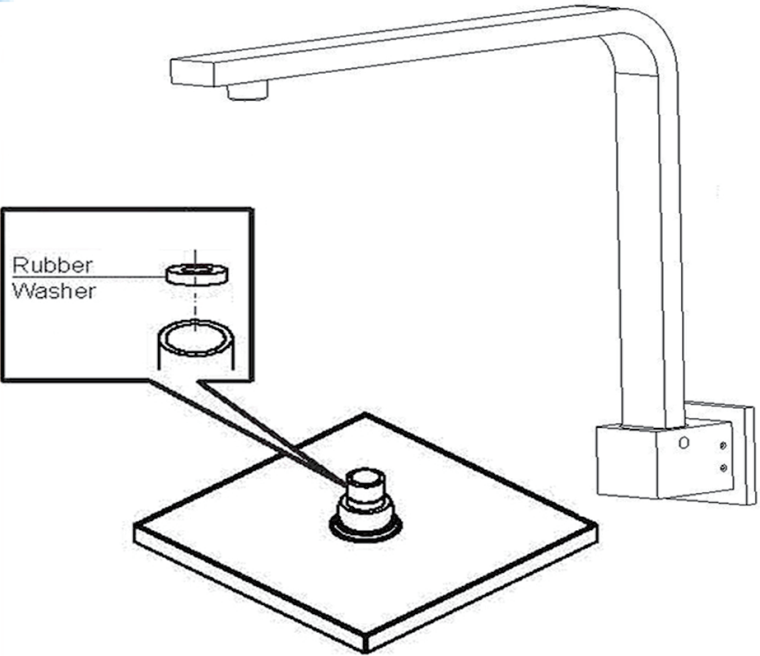

Rubber
Washer

shower head installation

Nero

