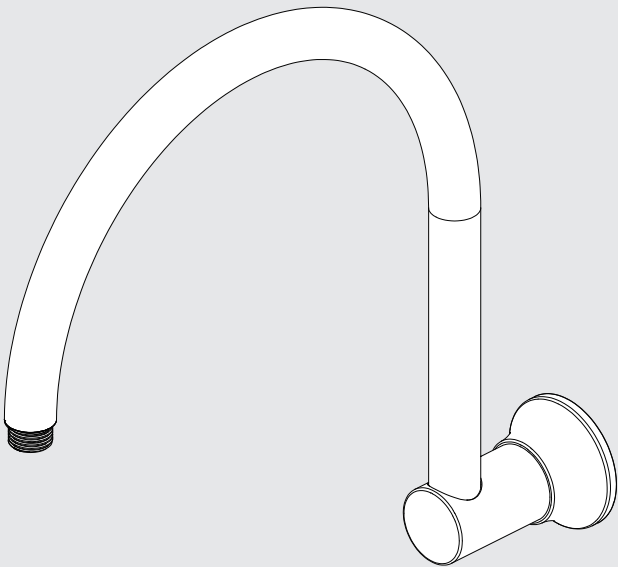


York Shower Arm

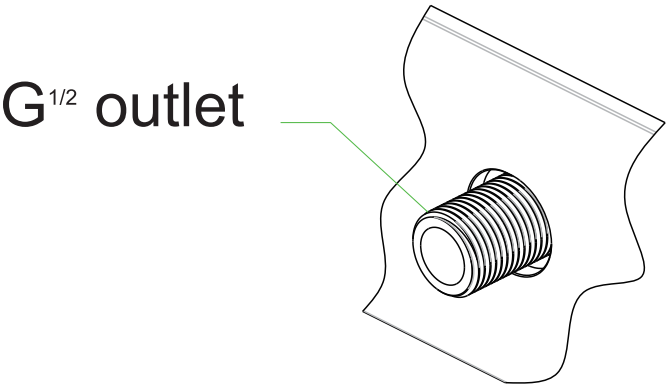
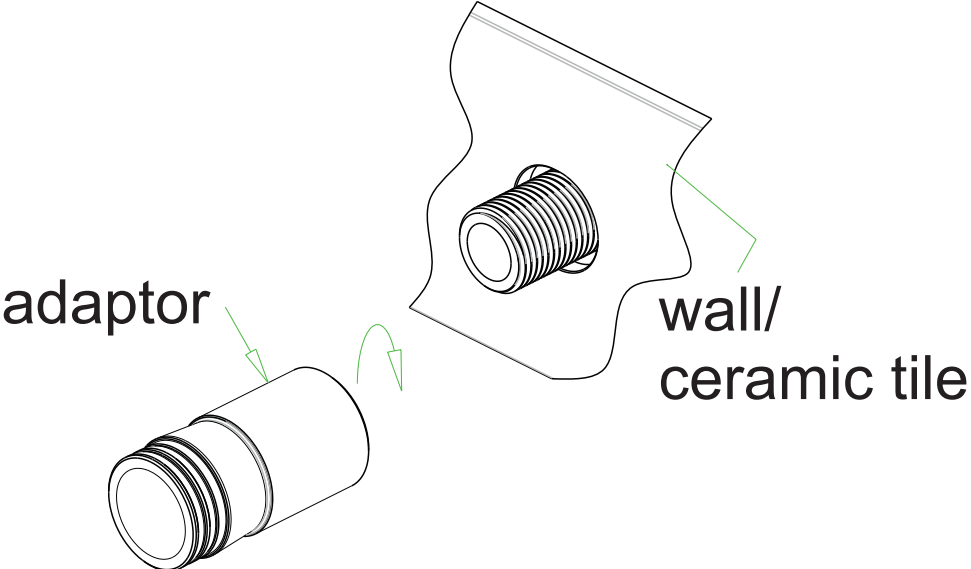
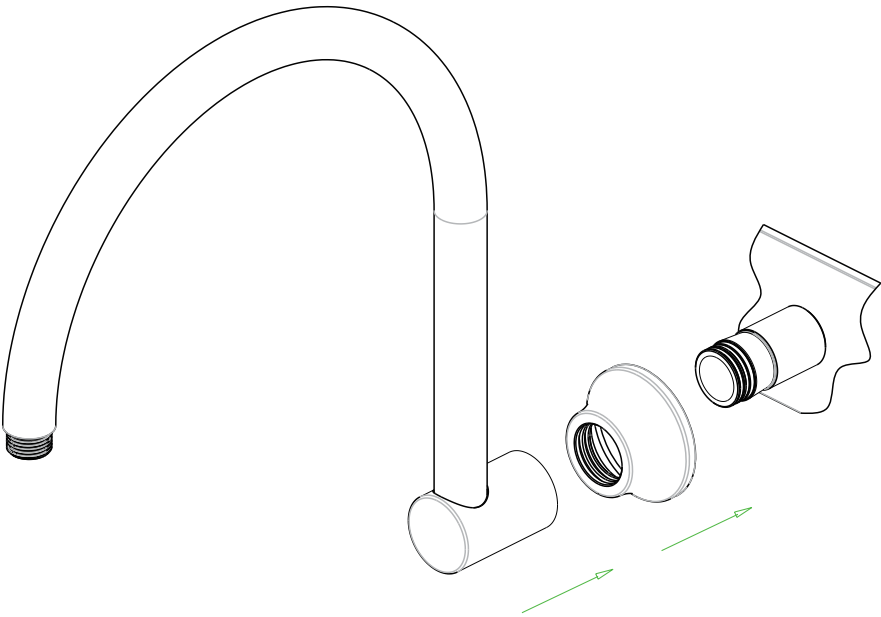
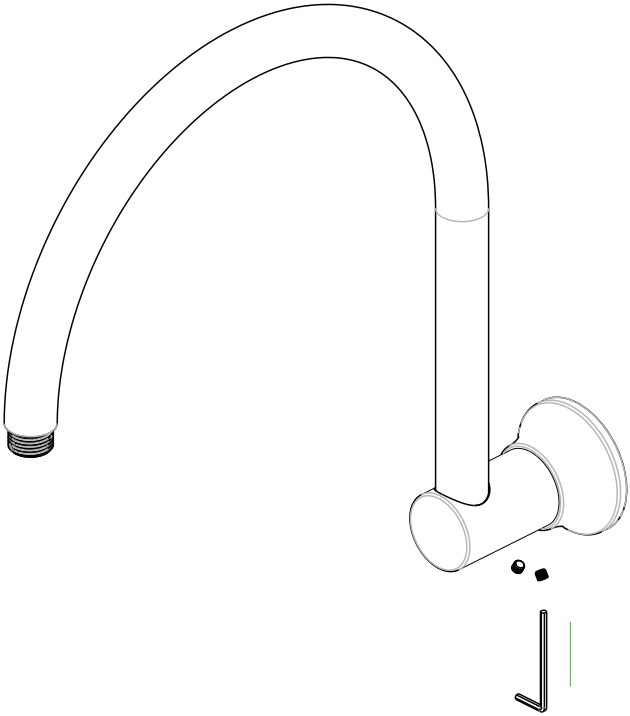
Nero



Versions:202506

Drawing	Specifications	Packaging Includes					
	Temperature Rating Min 1°C-Max 75°C	1x Shower Arm					
	Pressure Rating Min 150kpa - Max 500kpa						
	Finish & SKU <table><tr><td> Chrome NR508CH</td><td> Matte Black NR508MB</td><td> Aged Brass NR508AB</td></tr><tr><td> Brushed Nickel NR508BN</td><td></td><td></td></tr></table>	Chrome NR508CH	Matte Black NR508MB	Aged Brass NR508AB	Brushed Nickel NR508BN		
Chrome NR508CH	Matte Black NR508MB	Aged Brass NR508AB					
Brushed Nickel NR508BN							
*Dimensions are nominal measurements only.							

Installation Instruction

<div></div> <div><p>1. Apply thread sealant or teflon tape on outlet thread.</p></div>	<div></div> <div><p>2. Screw adaptor on to outlet. Make sure the face of inlet is flush with wall/ceramic tile face.</p></div>
<div></div> <div><p>3. Pull back plate on together with shower arm.</p></div>	<div><p>4. Pull shower arm onto adaptor. Screw grub screw into spout by wrench and cover by silicone cap.</p></div> <div></div>

Nero

