


Opal Shower On Bracket With Air Shower II


Nero



Versions:202506

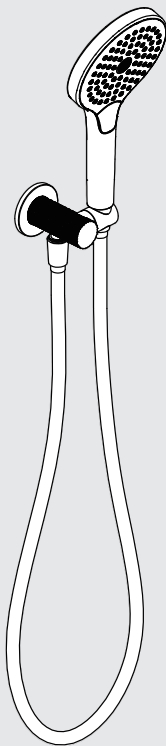

Drawing

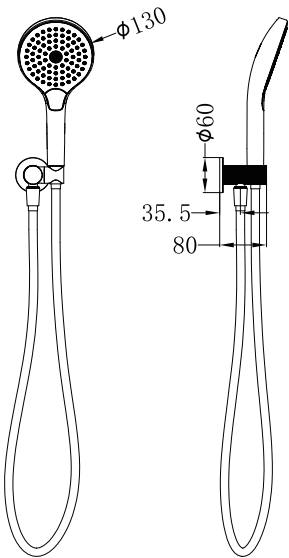

Specifications

Watermark License
WM-060093
Temperature Rating
Min 1 °C-Max 75 °C
Pressure Rating
Min 150kpa - Max 500kpa

Packaging Includes

1x Hand Shower (Built- In Check Valve)
1x Shower Bracket
1x 1.5m PVC Hose

Finish & SKU

- | | |
|--|--|
|  Brushed Bronze
NR251905fBZ |  Brushed Nickel
NR251905fBN |
|  Graphite
NR251905fGR |  Brushed Gold
NR251905fBG |

*Dimensions are nominal measurements only.


Important

All products must be installed by licensed plumbers.

All pipework must be thoroughly flushed prior to installation, as foreign materials may block the flow regulating device and reduce the flow of water.




1. Apply thread sealant or teflon tape on outlet thread.




2. Pull back plate on together with bracket body.

Apply thread sealant or teflon tape



3. Screw shower bracket body on to outlet. DO NOT OVERTIGHTEN. Slide the back plate against the wall/tile face properly.

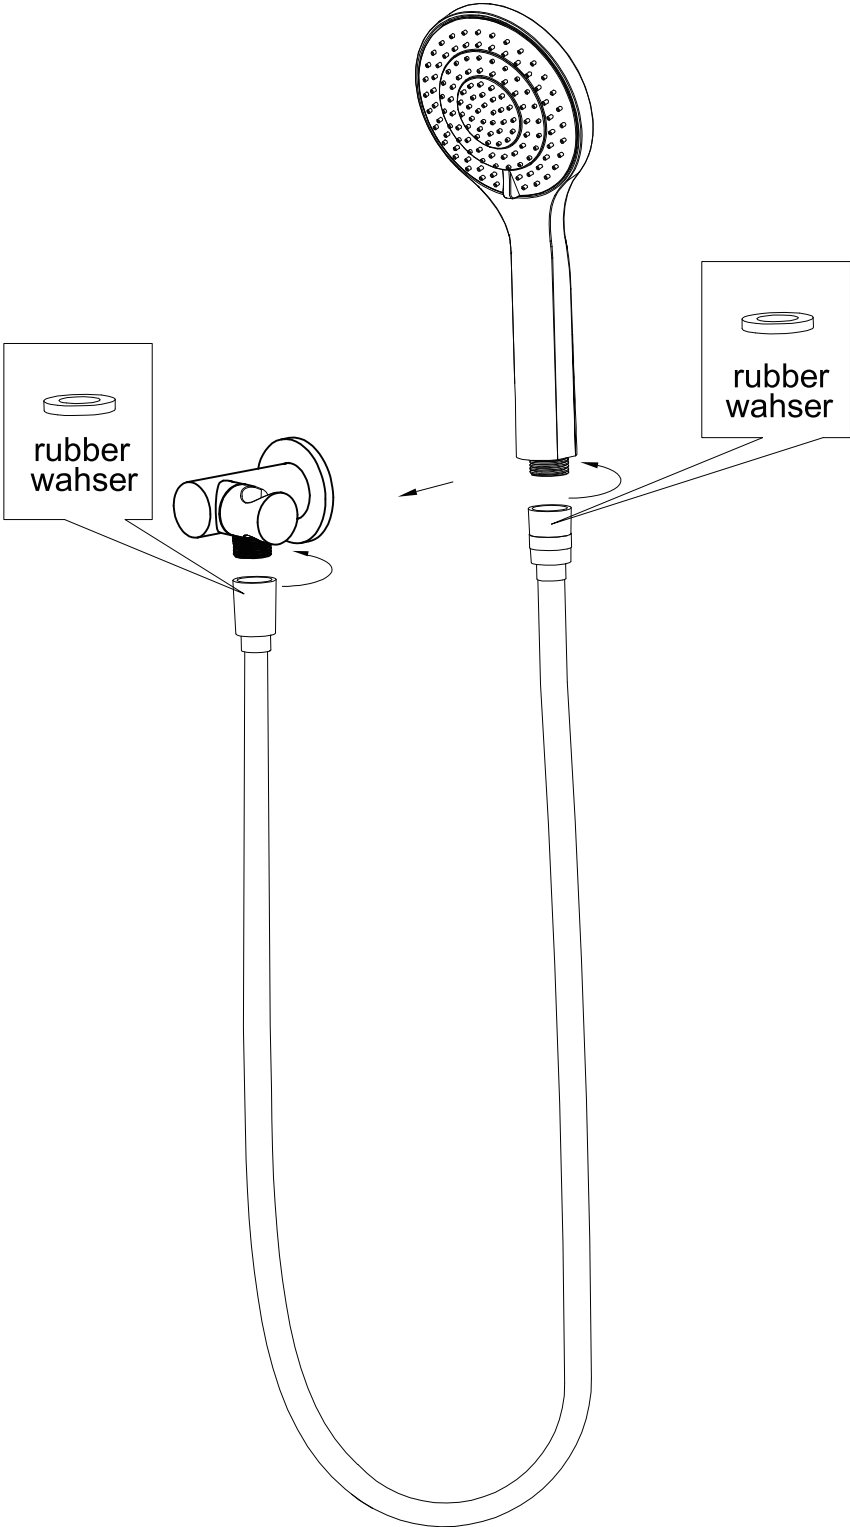

4. Connect bracket and hand shower with hose. TEST & CHECK FOR LEAKS.

Nero

