


Astra Rain Round Twin Shower double Hose


Nero



Versions:202506

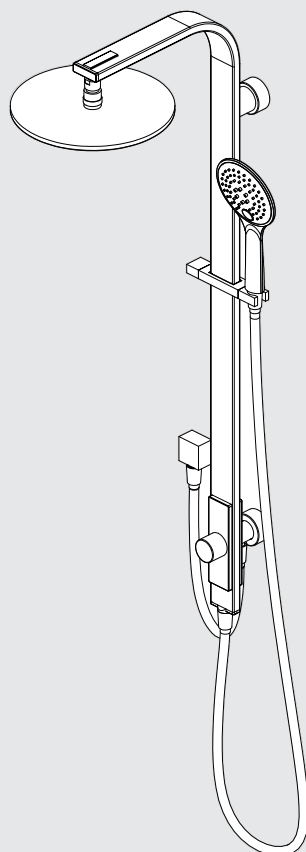

Drawing

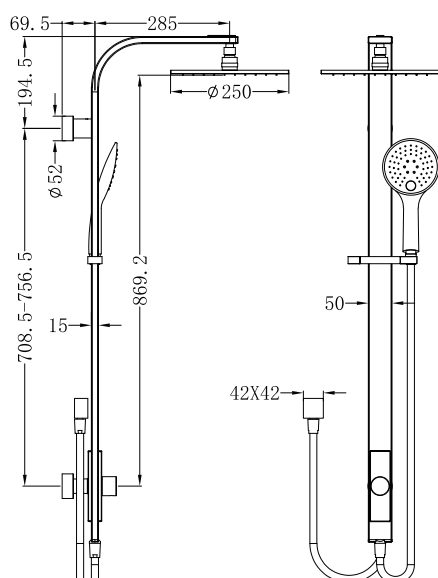

Specifications

Watermark License
WM-060093
Temperature Rating
Min 1°C-Max 75°C
Pressure Rating
Min 150kpa - Max 500kpa


Packaging Includes

1x Shower Arm
1x Shower Rail
1x Shower Head
1x Hand Shower
1x 1.5m PVC Shower Hose
For Hand Shower
1x 0.5m PVC Shower Hose For Elbow


Finish & SKU

 **Chrome**
NR281305bCH
 **Matte Black**
NR281305bMB


*Dimensions are nominal measurements only.

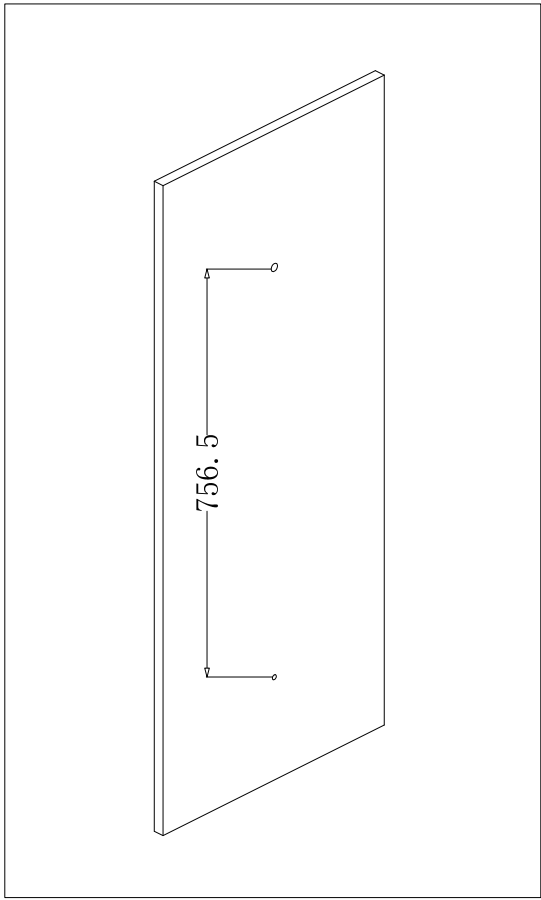


1. Drill two vertical holes in the wall, 756.5mm apart.

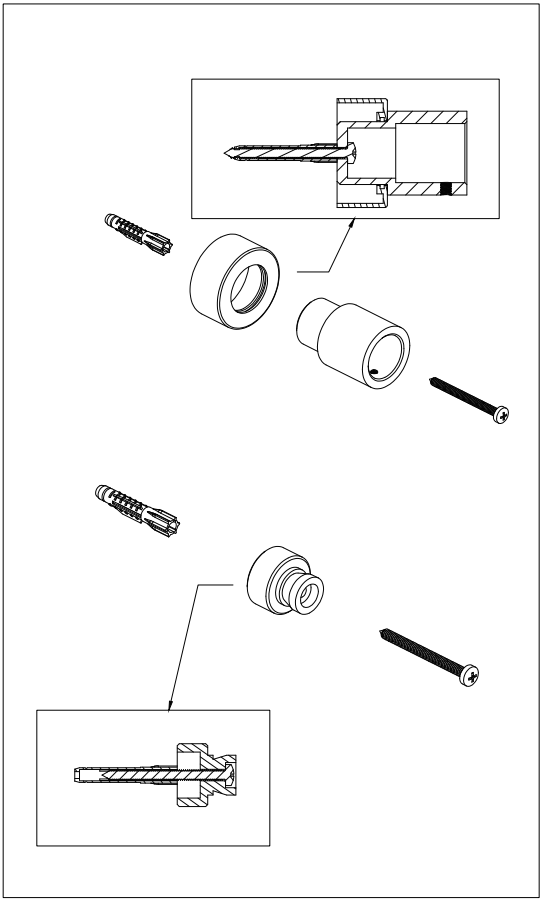


2. Insert the expansion screws into the holes, then attach the backplate and fixing bracket using the provided screws.

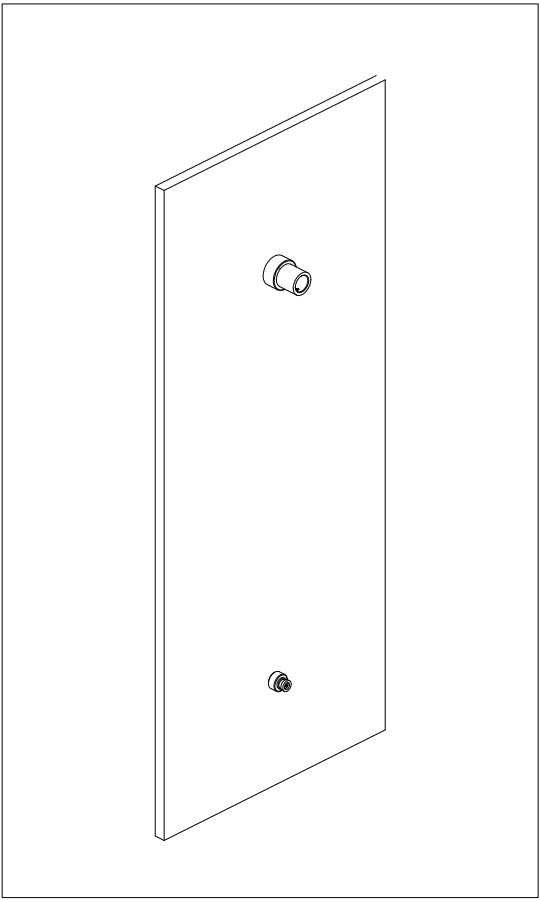


3. Verify the secure installation of the top and bottom brackets as shown in the image.

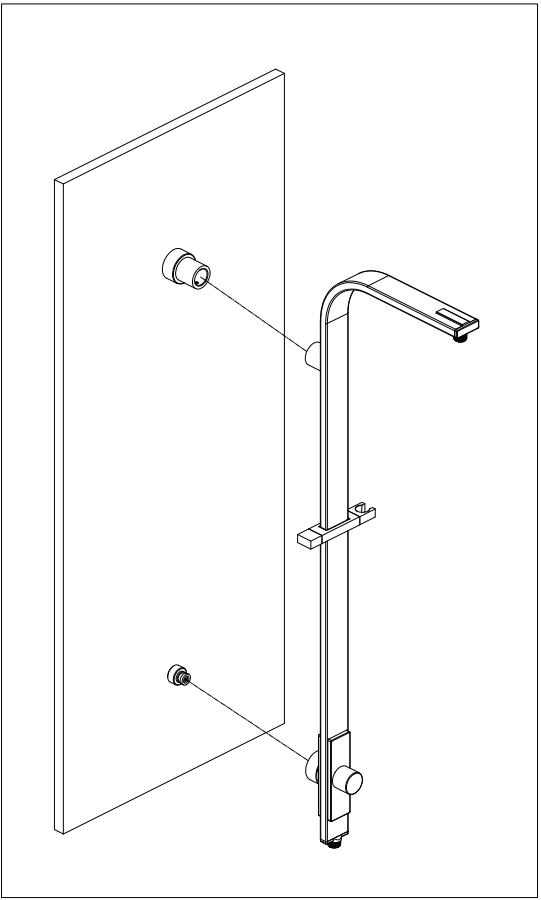


4. Place the shower rail onto the mounted brackets.

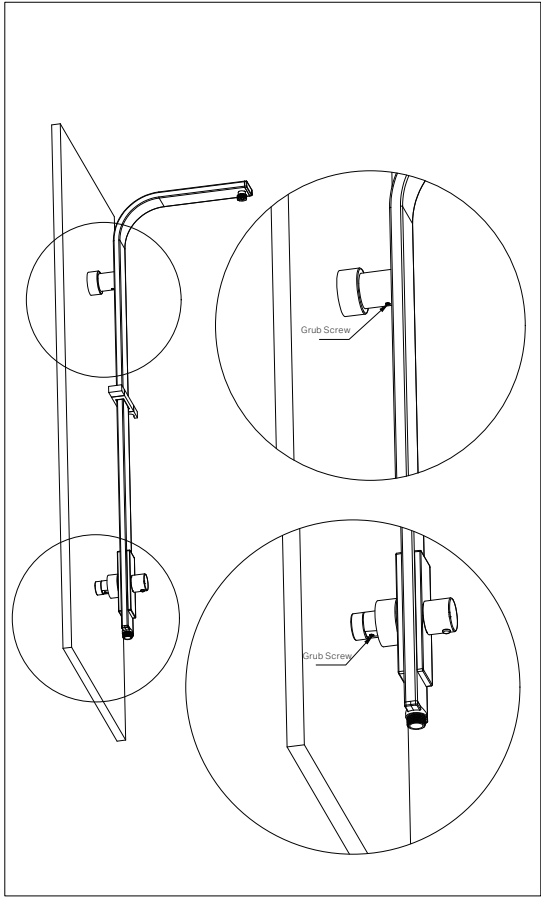

5. Push the shower rail onto the brackets firmly and tighten with the grub screw.

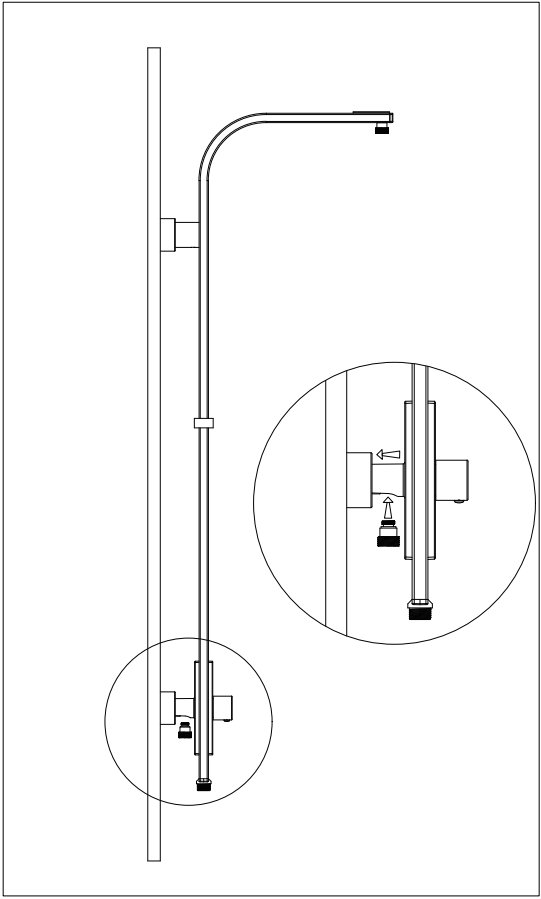

6. Adjust the bottom bracket so the water inlet connection thread is exposed.

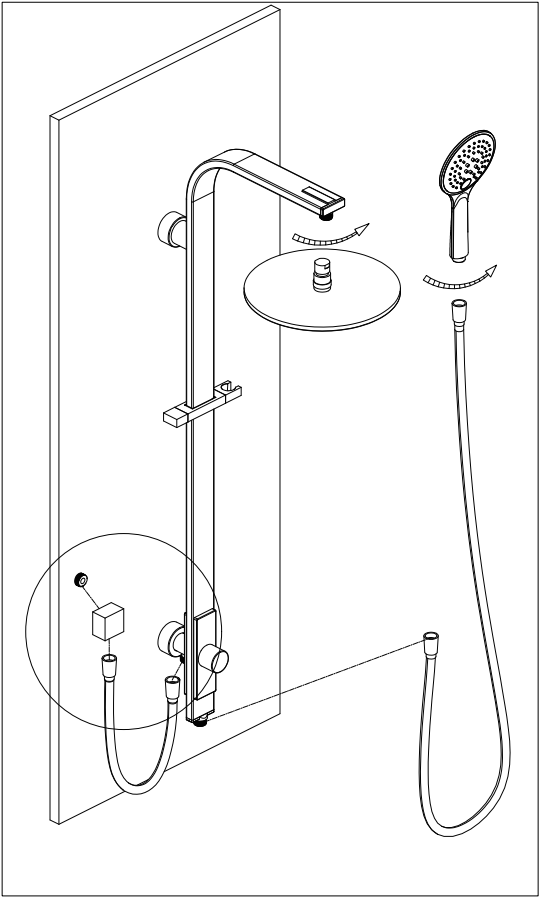

7. Attach the elbow to the water inlet. Connect the 0.5m hose from the elbow to the inlet connection, and the 1.5m hose from the lower end of the rail to the hand shower.

Nero

