


Celia Twin Shower


Nero



Versions:202506

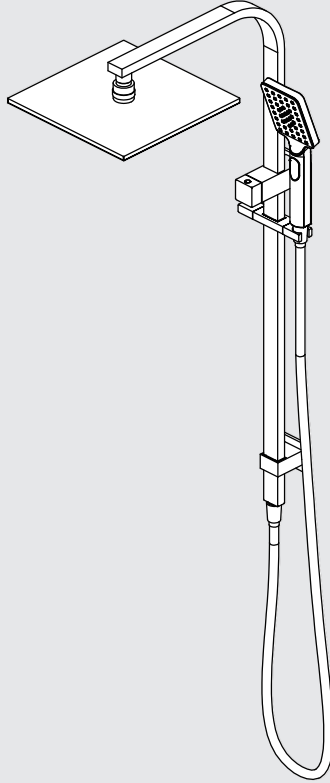

Drawing

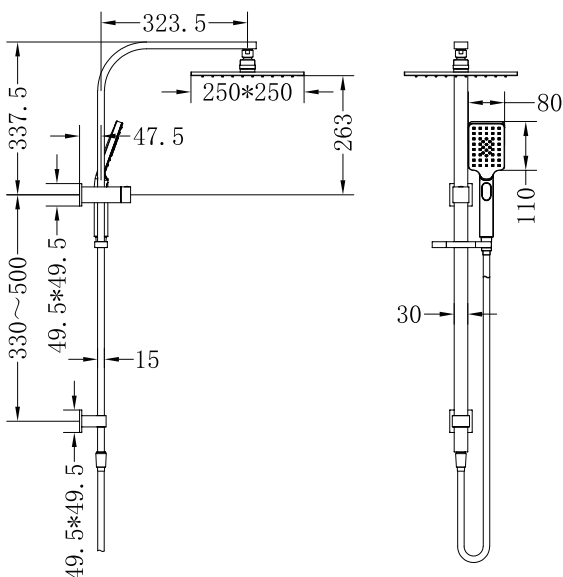

Specifications

Watermark License

WM-060093

Temperature Rating

Min 1°C-Max 75°C

Pressure Rating

Min 150kpa - Max 500kpa

Finish & SKU



Brushed Nickel
NR301505cBN



Gun Metal
NR301505cGM



Matte Black
NR301505cMB




Brushed Gold
NR301505cBG

Packaging Includes

1x Shower Arm
1x Shower Rail
1x Shower Head
1x Hand Shower (Built-In Check Valve)
1x 1.5m PVC Hose


*Dimensions are nominal measurements only.

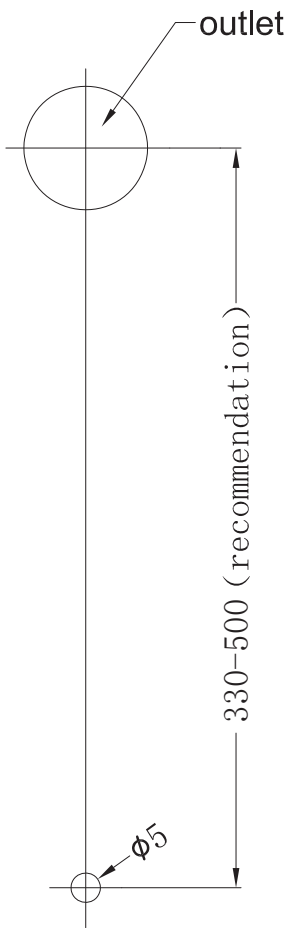


1.Drill a φ6mm hole at the outlet vertical downward position in the recommended range.




2. Screw the adapter on the outlet, and mount the bracket on theφ6mm hole by expansion plug and tapping screw.

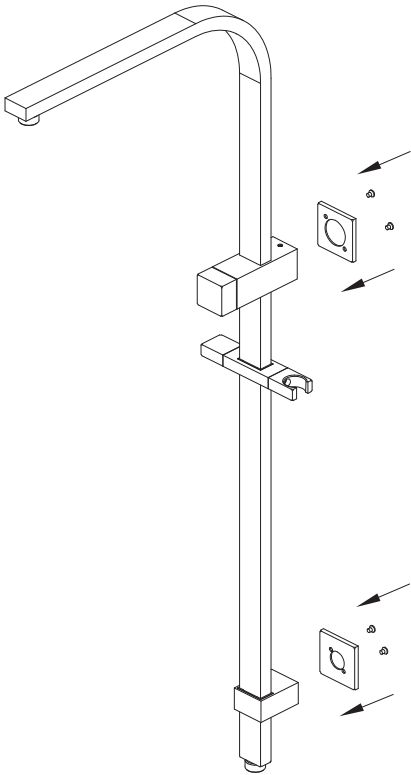


3. Screw the straight tube (with lower body) on diverter body, and then pull on the 2 dressing rings for both the diverter body and lower body.

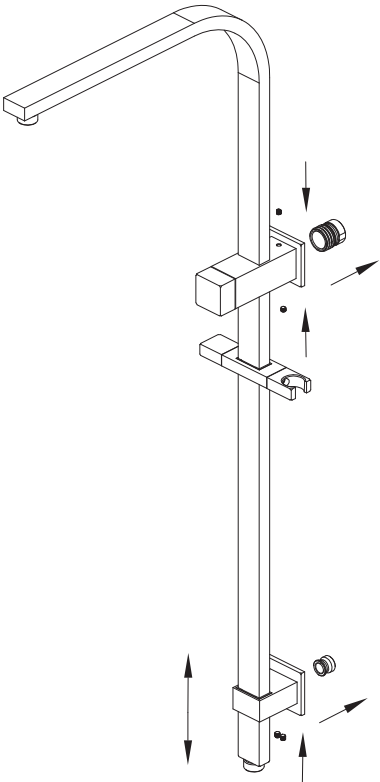

4.Adjust lower body position , and put diverter body and lower body on to the outlet adapter and the bracket, then tighten grub screws by Allen key.

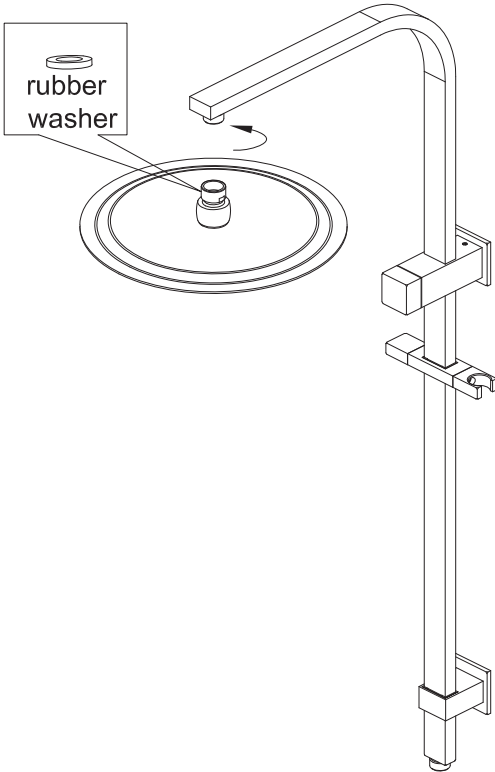

5.Screw on shower head.(note the rubber washer in the shower head.)

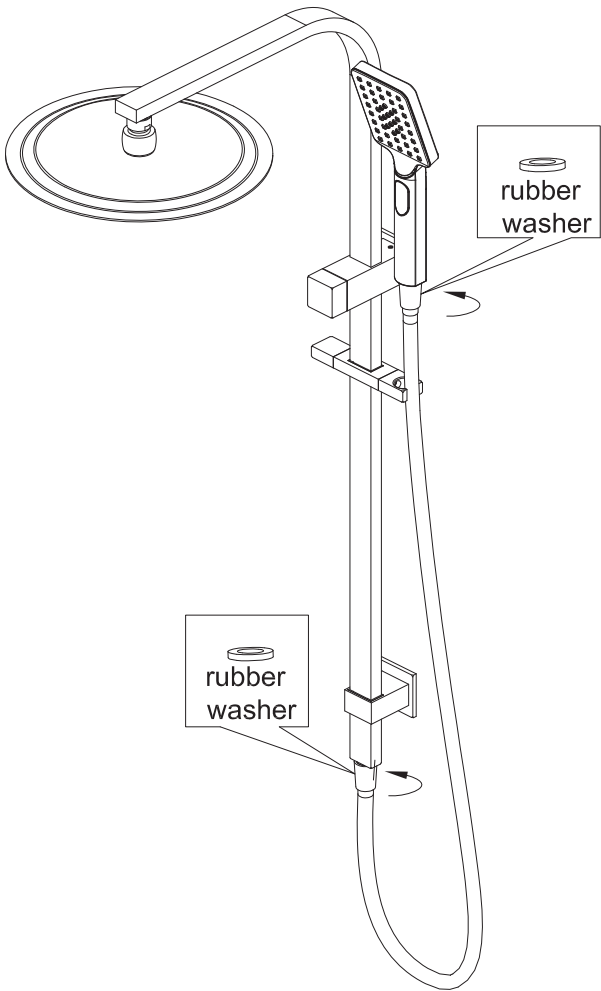

6.Screw shower hose to hand shower and shower rail.(note the rubber washers in the 2 joints of the shower hose).

Nero

