
# Celia Twin Shower






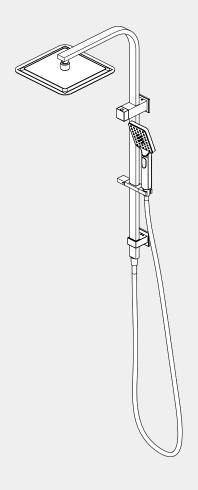

Versions:202506

## Drawing



## Specifications

Watermark License

WM-060093

Temperature Rating Min 1°C-Max 75°C

Pressure Rating

Min 150kpa - Max 500kpa

### Packaging Includes

- 1x Shower Arm
- 1x Shower Rail
- 1x Shower Head
- 1x Hand Shower (Built-In Check Valve)

1x 1.5m PVC Hose

#### Finish & SKU


Chrome NR301505cCH

<sup>\*</sup>Dimensions are nominal measurements only.

Nero ————2 Celia Twin Shower-Manual




1.Drill a φ6mm hole at the outlet vertical downward position in the recommended range.







2. Screw the adapter on the outlet, and mount the bracket on theφ6mm hole by expansion plug and tapping screw.

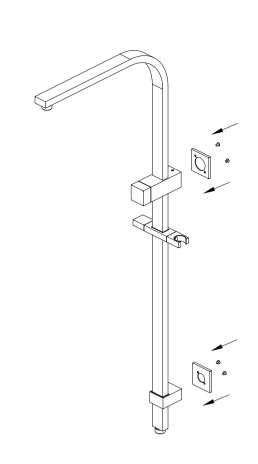


3. Screw the straight tube (with lower body) on diverter body, and then pull on the 2 dressing rings for both the diverter body and lower body.

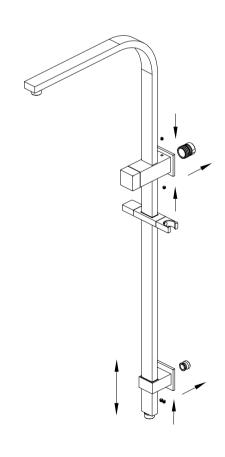

4. Adjust lower body position, and put diverter body and lower body on to the outlet adapter and the bracket, then tighten grub screws by Allen key.

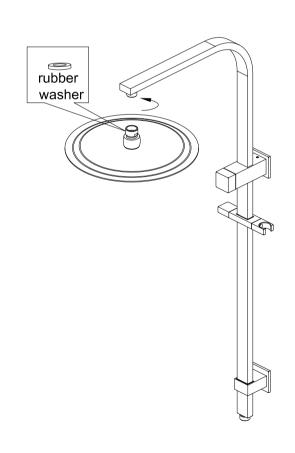

5.Screw on shower head.(note the rubber washer in the shower head.)

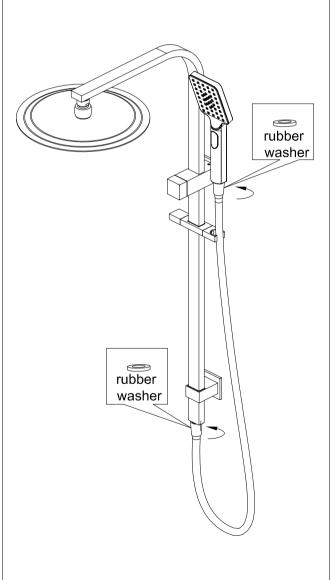

6.Screw shower hose to hand shower and shower rail.(note the rubber washers in the 2 joints of the shower hose).



