


Dolce II

Wall Basin/Bath Mixer

Separate Back Plate Curved Spout
Trim Kits Only



Lead Free

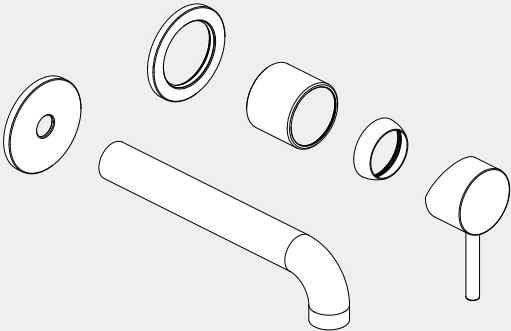

Version:202604




Drawing	Specifications	Packing Includes									
	Watermark License WM-060073 Temperature Rating Min 1 °C - Max 75 °C Pressure Rating Min 150kpa - Max 500kpa	1xTirm Kit 1xExtra Aerator (Without Flow Restrictor)									
<table><tr><th colspan="3">Finish & SKU</th></tr><tr><td> Chrome 25B017CH</td><td> Gun Metal 25B017GM</td><td> Brushed Nickel 25B017BN</td></tr><tr><td> Matte Black 25B017MB</td><td> Brushed Gold 25B017BG</td><td></td></tr></table>			Finish & SKU			Chrome 25B017CH	Gun Metal 25B017GM	Brushed Nickel 25B017BN	Matte Black 25B017MB	Brushed Gold 25B017BG	
Finish & SKU											
Chrome 25B017CH	Gun Metal 25B017GM	Brushed Nickel 25B017BN									
Matte Black 25B017MB	Brushed Gold 25B017BG										

*Dimensions are nominal measurements only.


Installation Instructions

GENERAL INSTRUCTIONS:


- This product must be installed by a licensed plumber. Ensure that your plumbing installation conforms to the Australian/New Zealand Standard AS/NZS 3500.
- All pipework must be thoroughly flushed prior to the installation of the mixer. In-line filters must be fitted on both hot and cold supplies to prevent foreign particles from damaging the ceramic cartridge.
- All outlets used primarily for personal hygiene must deliver water at a safe temperature in accordance with regional regulations.

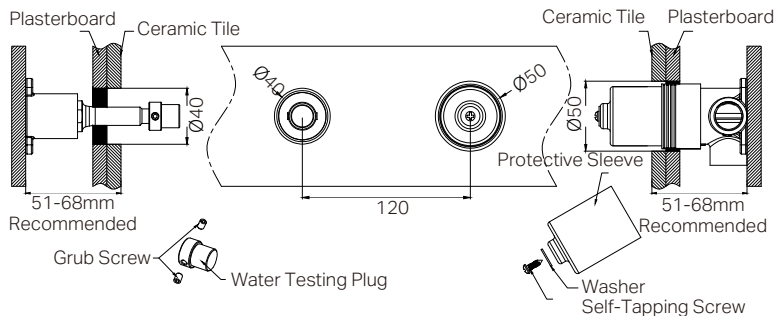

1. Drill a $\varnothing 50\text{mm}$ and a $\varnothing 40\text{mm}$ hole in the ceramic tile, then position it as shown in the above diagram.
2. Undo the self-tapping screw to remove the protective sleeve, and release the grub screws to remove the water testing plug.

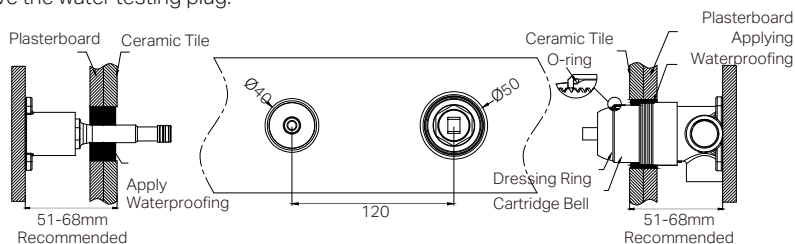


1. Slide the cartridge bell onto the body and insert the O-ring to the groove of the cartridge bell.
2. Apply waterproof treatment to the area in the diagram above.
3. Tighten the dressing ring onto the cartridge bell.

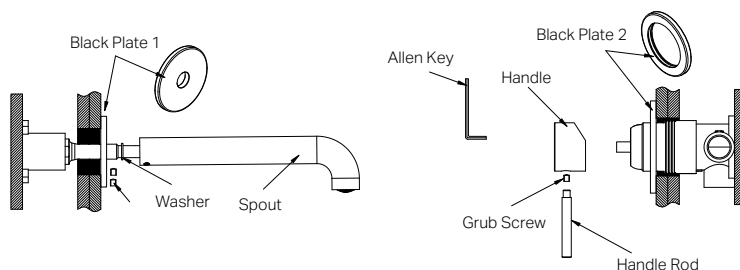

- 1.4. Slide the back plates and washer onto the wall, set the spout in place, and secure it tightly using the grub screws.
- 2.5. Insert the handle onto the cartridge stem, unscrew the handle rod, and use an allen key to tighten the grub screw to secure the handle. Then, screw the handle rod back in place.

REPLACING THE AERATOR

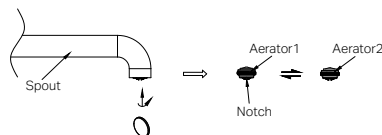

1. Note:

Apply the aerator to the spout with the coin. The flow rate of the aerator 1 is low, recommend you apply it for basin spout. The flow rate of the aerator 2 is higher, recommend you apply it for bath spout.

Nero

