


Ecco Shower Mixer With Diverter Trim Kits Only

Nero



Lead Free

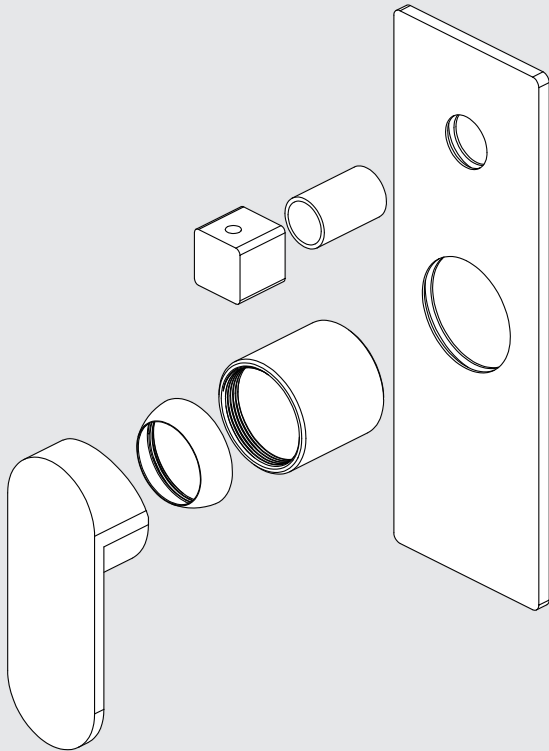


Versions:202506


Drawing	Specifications	Packaging Includes					
Front View Dimensions: 70 (width), 210 (height), 68 (handle height). Side View Dimensions: 7.95 (plate thickness), 39.35 (plate depth), 5.25 (handle base width), 60.05 (handle base depth), 112 (handle height).	Watermark License WM-060073 Temperature Rating Min 1°C-Max 75°C Pressure Rating Min 150kpa - Max 500kpa	1x Plate 1x Handle 1x Knob 1x Sleeve 1x Cartridge Bell 1x Dressing Ring					
	Finish & SKU <table><tr><td>Chrome NR301311atCH</td><td>Gun Metal NR301311atGM</td><td>Brushed Nickel NR301311atBN</td></tr><tr><td>Matte Black NR301311atMB</td><td>Brushed Gold NR301311atBG</td><td></td></tr></table>	Chrome NR301311atCH	Gun Metal NR301311atGM	Brushed Nickel NR301311atBN	Matte Black NR301311atMB	Brushed Gold NR301311atBG	
Chrome NR301311atCH	Gun Metal NR301311atGM	Brushed Nickel NR301311atBN					
Matte Black NR301311atMB	Brushed Gold NR301311atBG						

*Dimensions are nominal measurements only.


Installation Instruction For Trim Kits Only

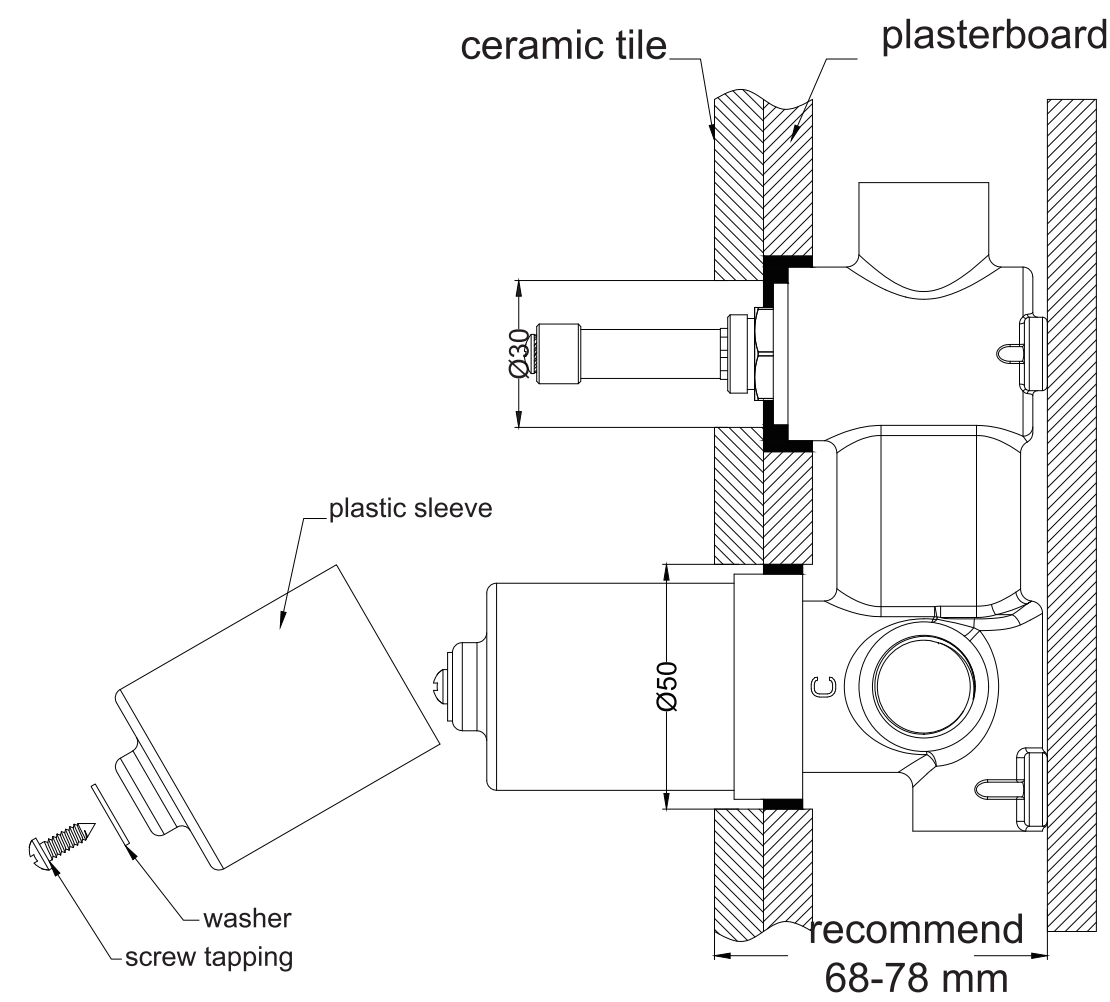

1. Drill a $\phi 50\text{mm}$ and a $\phi 30\text{mm}$ hole in the ceramic tile, then position it as shown in the above diagram.
2. Undo the self-tapping screw to remove the plastic sleeve.

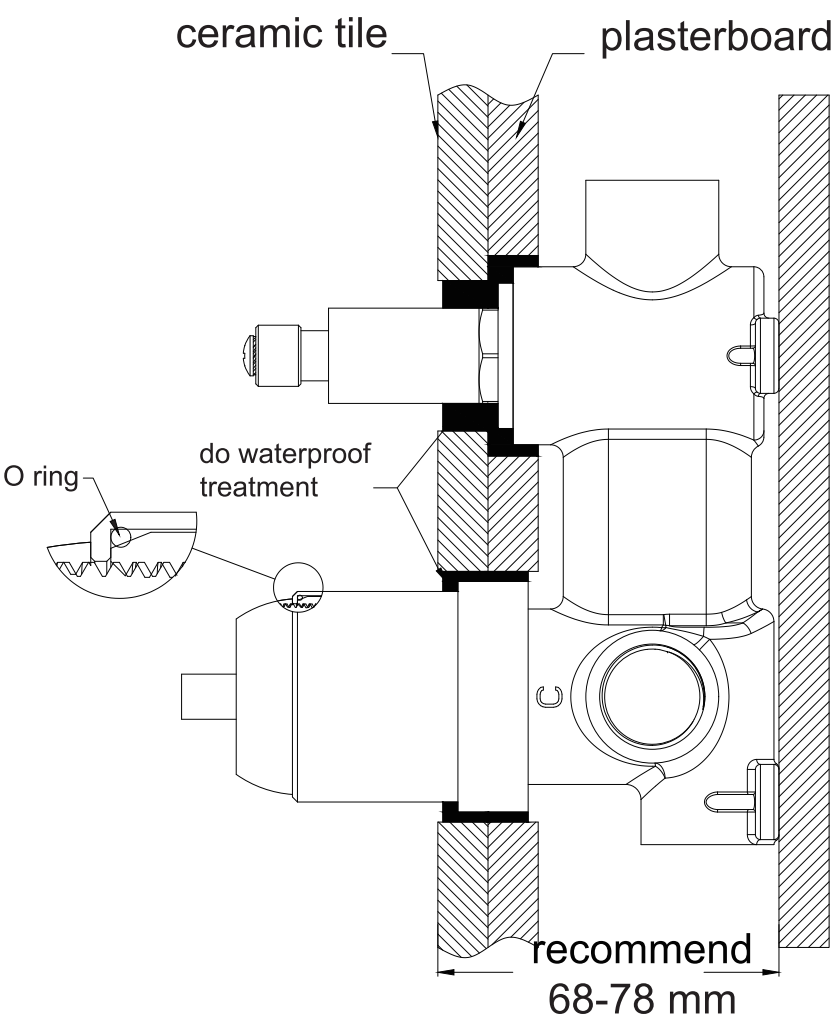

3. Insert the O ring to the dressing bell groove, and slide the cartridge bell onto cartridge and slide Diverter dressing bell onto Diverter cartridge.
4. Apply waterproof treatment to the area indicated in the diagram above.
5. Tighten up the dressing ring on the cartridge bell.

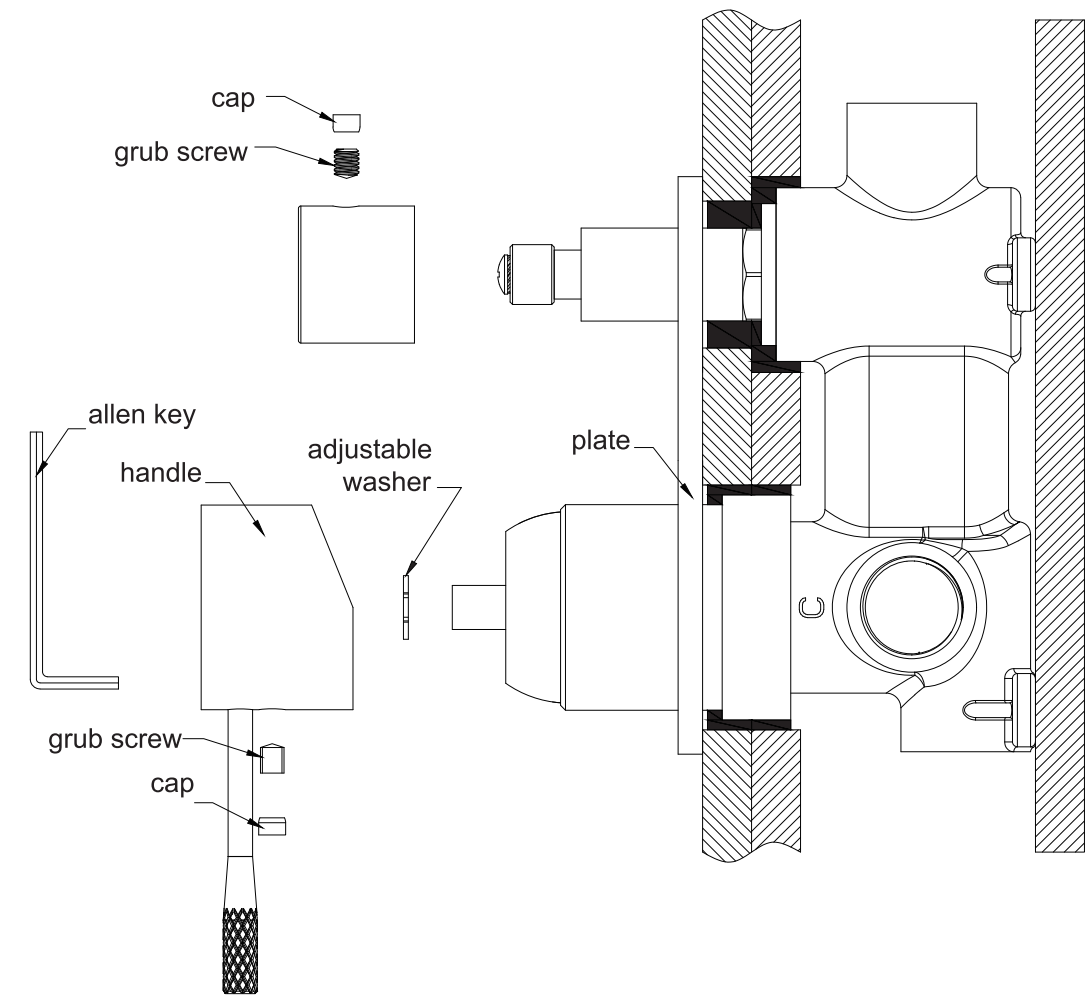

6. Slide the backplate onto body.
7. Attach the washer to cartridge rod, position the handle, tighten it with a grub screw using an Allen key, and cap the grub screw hole.
8. Put knob onto Diverter cartridge, tighten it with grub screw using Allen key, and cap the grub screw hole.

Nero

