


Pure SS316L Wall Basin/Bath Mixer

Nero

Trim Kits Only






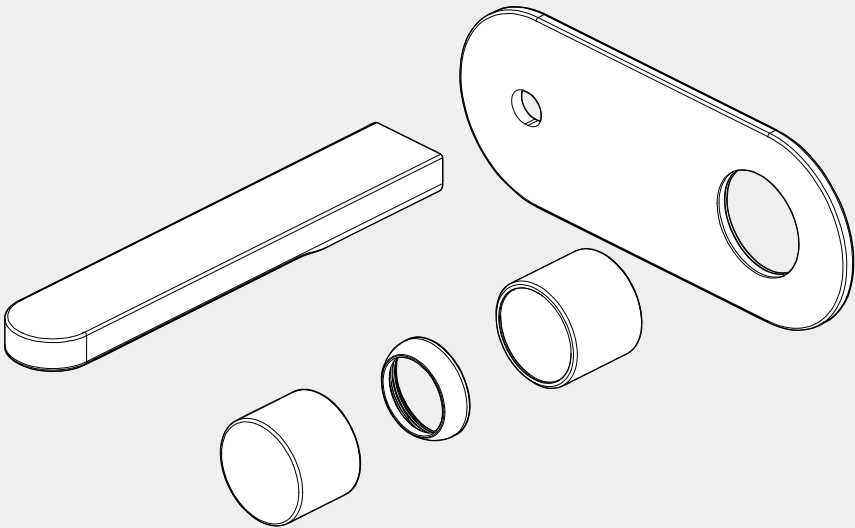





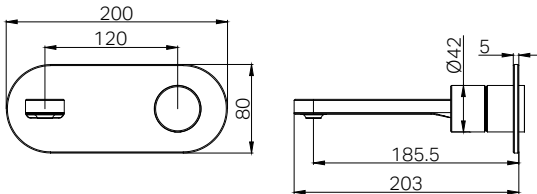



Lead Free



Version:202506




Drawing	Specifications	Packaging Includes			
	<p>Watermark License WM-060073</p> <p>Temperature Rating Min 1°C-Max 75°C</p> <p>Pressure Rating Min 150kpa - Max 500kpa</p>	<p>1x Spout 1x Plate 1x Handle 1x Cartridge Bell 1x Dressing Ring 1x Installation Kit 1x Non-Restrictive Aerator</p>			
	<p>Finish & SKU</p> <table><tr><td> Brushed Bronze NR172210atBZ</td><td> Graphite NR172210atGR</td></tr><tr><td> Brushed Gold NR172210atBG</td><td> Brushed Nickel NR172210atBN</td></tr></table>	 Brushed Bronze NR172210atBZ	 Graphite NR172210atGR	 Brushed Gold NR172210atBG	 Brushed Nickel NR172210atBN
 Brushed Bronze NR172210atBZ	 Graphite NR172210atGR				
 Brushed Gold NR172210atBG	 Brushed Nickel NR172210atBN				

*Dimensions are nominal measurements only.
*Includes an additional non-restrictive aerator for bath use.


Installation Instruction

GENERAL INSTRUCTIONS:


- This product must be installed by a licensed plumber. Ensure that your plumbing installation conforms to the Australian/New Zealand Standard AS/NZS 3500.
- All pipework must be thoroughly flushed prior to the installation of the mixer. In-line filters must be fitted on both hot and cold supplies to prevent foreign particles from damaging the ceramic cartridge.
- All outlets used primarily for personal hygiene must deliver water at a safe temperature in accordance with regional regulations.

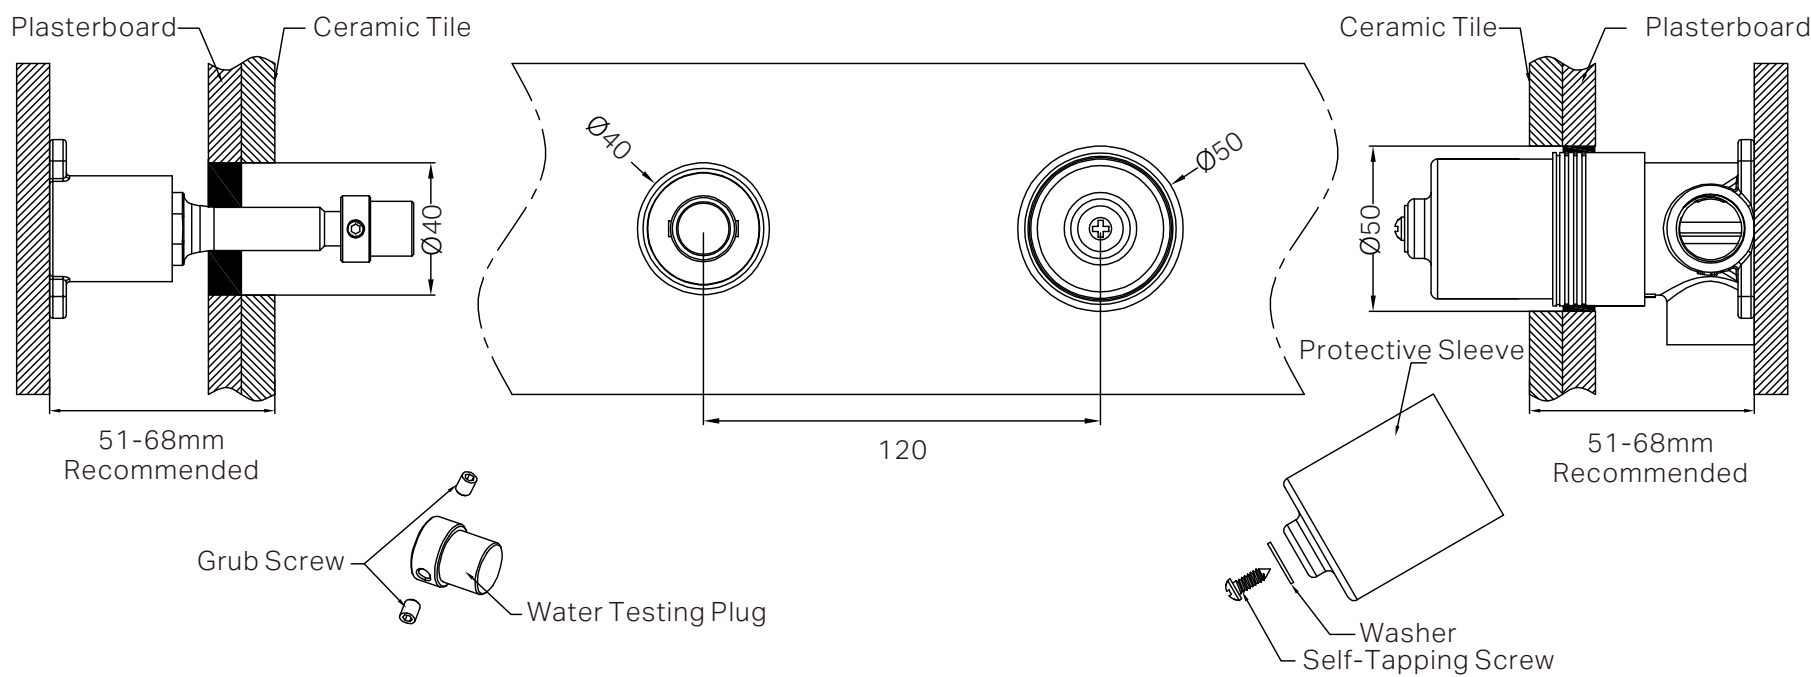

1. Drill a Ø50mm and a Ø40mm hole in the ceramic tile, then position it as shown in the above diagram.
2. Undo the self-taping screw to remove the protective sleeve, and release the grub screws to remove the water testing plug.

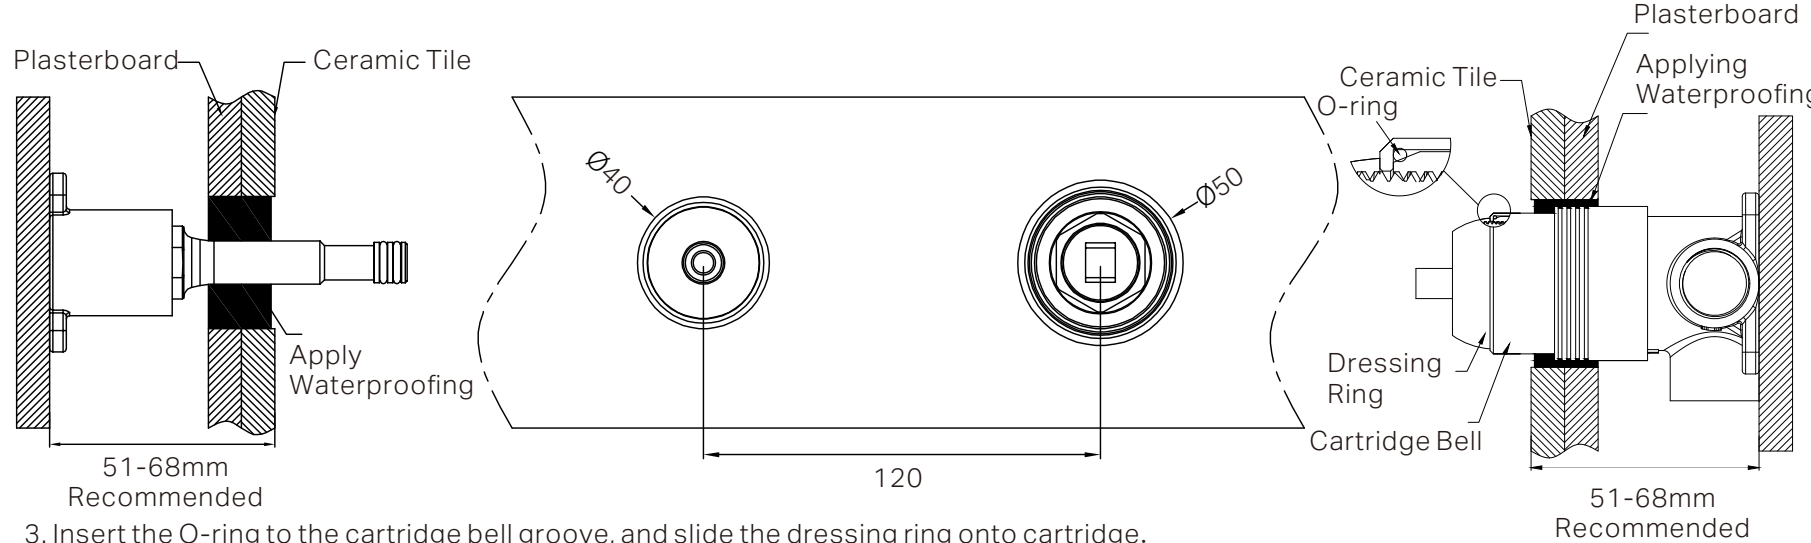

3. Insert the O-ring to the cartridge bell groove, and slide the dressing ring onto cartridge.
4. Apply waterproofing to the area indicated in the diagram above.
5. Tighten up the dressing ring on the cartridge bell.

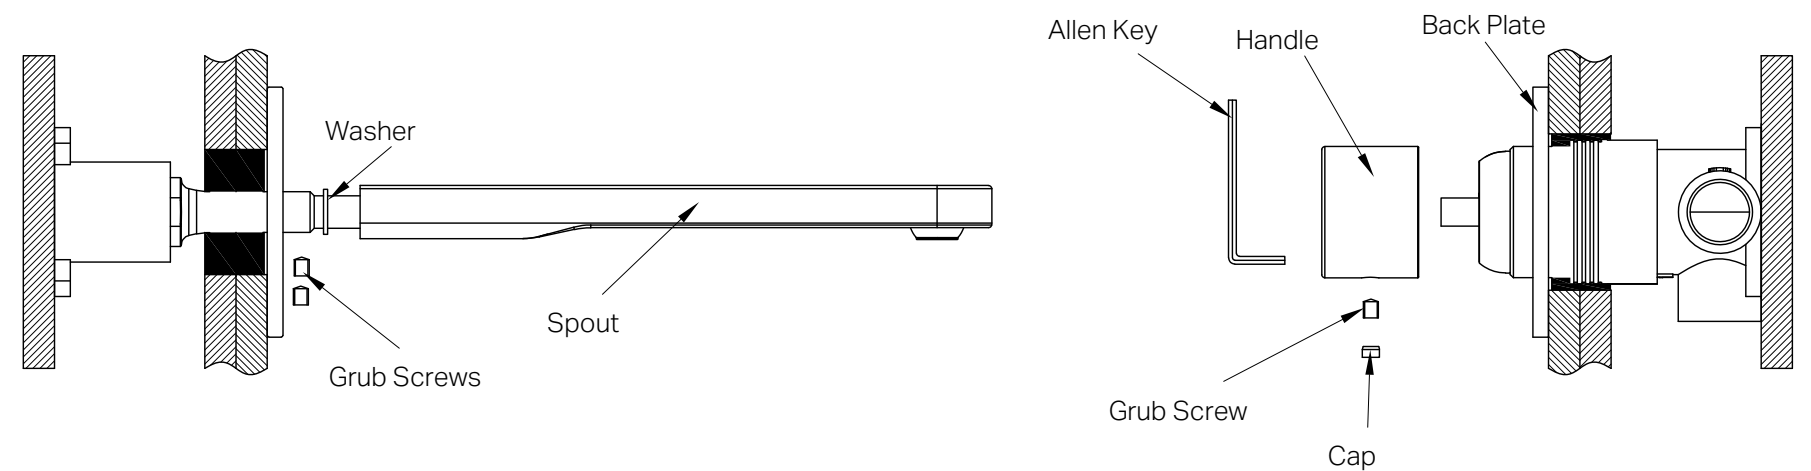

6. Slide the back plate and washer onto the wall, set the spout in place, and secure it tightly using the grub screw.
 7. Position the handle, tighten it with a grub screw using an allen key, and cap the grub screw hole.
- please note: there is a washer between back plate and the spout.

MAINTENANCE AND CARE:

- Regularly check the mixer and connections for signs of wear or leaks.
- Clean the tap with mild soapy water to maintain its appearance, avoiding harsh chemicals and abrasive materials that may damage the finish.

FINAL INSPECTION:

- Ensure the tap operates smoothly and that there are no leaks at the connections.
- Clean the area and the newly installed tap with a soft cloth to remove any installation residues.

Nero

