
Celia Shower Mixer Rectangular Backplate


Nero

Trim Kits Only

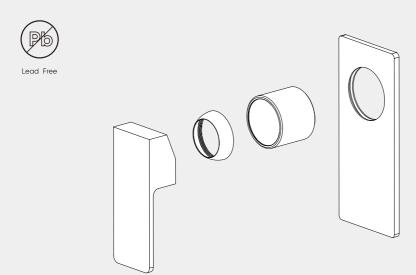

Version: 202508

Drawing



Specifications

Watermark License WM-060073 Temperature Rating Min 1 °C - Max 75 °C Pressure Rating Min 150kpa - Max 500kpa

Package Includes

1x Backplate 1x Handle 1x Cartridge Bell

1x Dressing Ring 1x Installation Kits

Finish & SKU


Chrome NR301511btCH


Brushed Nickel NR301511btBN Matte Black
NR301511btMB

INSTALLATION INSTRUCTIONS


GENERAL INSTRUCTIONS:

- This product must be installed by a licensed plumber. Ensure that your plumbing installation complies with the Australian/New Zealand Standard AS/NZS 3500.
- All pipework must be thoroughly flushed prior to the installation of the mixer. In-line filters must be fitted on both hot and cold supplies to prevent foreign particles from damaging the ceramic cartridge.
- All outlets used primarily for personal hygiene must deliver water at a safe temperature in accordance with regional regulations.





- 1. Drill a Ø50mm hole in the ceramic tile, then position it as shown in the above diagram.
- 2. Undo the self-tapping screw, washer, protective sleeve.
- 3. Insert the O-ring to the cartridge bell groove, and slide the dressing ring onto cartridge.
- 4. Apply waterproof treatment to the area in the diagram above.
- 5. Tighten the dressing ring on the cartridge bell.



6. Install the back plate against the wall. Fit the handle adjustment shim onto the cartridge stem, attach the handle using a grub screw, and cover the grub screw hole with the cap.

FINAL INSPECTION:

- Ensure the tap operates smoothly and that there are no leaks at the connections.
- Clean the area and the newly installed tap with a soft cloth to remove any installation residues.

MAINTENANCE AND CARE:

- Regularly check the mixer and connections for signs of wear or leaks.
- Clean the tap with mild soapy water to maintain its appearance, avoiding harsh chemicals and abrasive materials that may damage the finish.

Nero

